

KEYSTONE

CASTOR COMPANY

Midlands: 0121 772 1010 | Northern: 0161 865 3800

Web: www.keystonecastors.co.uk | Email: sales@keystonecastors.com

The Key Range Compact Catalogue

Compact to Save Paper – Cutting the Waffle, Not the Range.

See all our products online: www.keystonecastors.com



All the Key Range Castors you need in one place
Right Product, Right Price, Right Here

Contents

Page #	Series Name	Duty	Description	Fitting Type	Wheel Diameter Range (mm)	Load Capacity Range (kg)
3	LDV	Light	Pressed Steel Castors	Top Plate Bolt Hole	50 - 200	50 - 250
4	MDZ	Medium	Pressed Steel Castors	Top Plate	80 - 200	50 - 350
5	MDZH	Medium	Pressed Steel Castors	Bolt Hole	80 - 200	50 - 350
6	MSS	Medium	Stainless Steel Castors	Top Plate Bolt Hole	80 - 200	120 - 300
7	MSK	Medium / Heavy	Pressed Steel Castors	Top Plate	100 - 200	150 - 600
8	MDX	Medium - High Temp	Pressed Steel Castors	Top Plate Bolt Hole	80 - 200	100 - 300
9	KP	Heavy	Pressed Steel Castors	Top Plate	125 - 200	200 - 800
10	KGHP	Heavy	Pressed Steel Castors	Top Plate	150 - 200	700 - 900
11	MG	Medium / Heavy	Fabricated Steel Castors	Top Plate	100 - 200	200 - 600
12	HK	Heavy	Fabricated Steel Castors	Top Plate	125 - 300	250 - 1,300
13	HST	Heavy	Fabricated Steel Castors	Top Plate	100 - 200	300 - 950
14	GXT	Extra Heavy	Fabricated Steel Castors	Top Plate	80 - 250	500 - 2,700
14	UGXT	Ultra Heavy	Fabricated Steel Castors	Top Plate	200 - 300	6,000 - 8,000
15	K2	Extra Heavy	Twin Wheel Fabricated Castors	Top Plate	125 - 300	750 - 4,000
15	AGV-AMR	-	Automated Guided Vehicle Castor	-	-	-
16	GDS	Shock Absorbing	-	Top Plate	50 - 200	40 - 350
17	KGDSP	Shock Absorbing	Pressed Steel Castors	Top Plate	150 - 200	360 - 450
18	KGD	Medium / Heavy	Levelling Castor	Top Plate Stem Fitting	42 - 90 42 - 75	60 - 1,500 60 - 1,000
18	KGDH	Extra Heavy	Levelling Castors	Stem Fitting	50 - 75	150 - 700
18	KGDL	Extra Heavy	Levelling Castors	Top Plate	50 - 75	150 - 700
19	Castor Wheels	-	Nylon / Polypropylene	-	50 - 250	54 - 1,500
20	Castor Wheels	-	Polyurethane Tyre / Nylon Centre	-	80 - 200	100 - 600
21	Castor Wheels	-	Elastic Rubber Tyre	-	50 - 250	27 - 550
22	Castor Wheels	-	Polyurethane Tyre (Aluminium)	-	80 - 200	180 - 800
23	Castor Wheels	-	Polyurethane Tyre (Cast Iron)	-	50 - 300	80 - 4,080
24	PT Designer	Heavy	Revothane Polyurethane Tyre Wheel	-	75 - 300	300 - 2,800
25	Castor Wheels	-	Cast Iron (Solid)	-	75 - 250	250 - 1,400
26	Castor Wheels	-	Solid Rubber Tyre	-	100 - 450	70 - 1100
27	Castor Wheels	-	Pneumatic Wheels	-	220 - 400	100 - 150
28	Ball Units	-	Ball Transfer Units	-	15.8 – 31.75	10 - 160
29	Adjustable Feet	-	Adjustable Feet	Stem Fitting	-	100 - 1,000
30	Expanders	-	Expander Tube Fittings	-	-	-
31	Inserts	-	Threaded Inserts	-	-	-

- Load capacities are based on normal working conditions and manually propelled at a maximum speed of 4km/h
- Since load capacity ratings are only general recommendations they can be subject to wide variations under different working conditions. It may be necessary to select a castor with a much higher load rating than the actual weight being carried by the castor
- Factors that affect the required load capacity of a castor include (but not limited to):
 - Uneven floor surface
 - Ramps, slopes, cracks, kerbs, potholes
 - Uneven load distribution
- On equipment to be fitted with 4 castors, it's industry standard to recommend that the minimum load capacity required by a castor is calculated using the formula:
 - Load Capacity of Castor = (Load + Weight of Transport Equipment) / 3
- Unless otherwise stated in the catalogue castors cannot be power towed

LDV Series

Light Duty Pressed Steel Castor

- Load capacities from 50kg up to 250kg
- Wheel sizes from 50mm to 200mm
- Pressed steel bracket
- Double ball race swivel head
- See Page 30 for expander fittings

All available in the following types

Top Plate



Bolt Hole



White Polypropylene

Wheel Dia. (mm)	Tread Width (mm)	Bearing Type	Top Plate (mm)	Bolt Holes (mm)	Offset (mm)	Overall Height (mm)	Load Cap. (kg)	Swivel	Swivel Brake	Fixed
50	18	Plain	50x50	36x36	32	72	50	LSV050PP	LSV050PPBR	N/A
75	25	Plain	75x60	55x42	34	95	70	LSV075PP	LSV075PPBR	LFV075PP
100	35	Roller	102x84	80x60	34	128	125	LSV100PP	LSV100PPBR	LFV100PP
125	37	Roller	102x84	80x60	34	155	160	LSV125PP	LSV125PPBR	LFV125PP
160	40	Roller	135x110	105x80	48	190	200	LSV160PP	LSV160PPBR	LFV160PP
200	40	Roller	135x110	105x80	58	235	250	LSV200PP	LSV200PPBR	LFV200PP



Grey Rubber Tyre / Polypropylene Centre

Wheel Dia. (mm)	Tread Width (mm)	Bearing Type	Top Plate (mm)	Bolt Holes (mm)	Offset (mm)	Overall Height (mm)	Load Cap. (kg)	Swivel	Swivel Brake	Fixed
50	18	Plain	50x50	36x36	32	72	50	LSV050RP	LSV050RPBR	N/A
75	25	Roller	75x60	55x42	34	95	50	LSV075RP	LSV075RPBR	LFV075RP
100	24	Roller	102x84	80x60	34	128	70	LSV100RP	LSV100RPBR	LFV100RP
125	24	Roller	102x84	80x60	34	155	100	LSV125RP	LSV125RPBR	LFV125RP
160	22	Roller	135x110	105x80	48	190	135	LSV160RP	LSV160RPBR	LFV160RP
200	30	Roller	135x110	105x80	58	235	205	LSV200RP	LSV200RPBR	LFV200RP



Black Rubber Tyre / Metal Centre

Wheel Dia. (mm)	Tread Width (mm)	Bearing Type	Top Plate (mm)	Bolt Holes (mm)	Offset (mm)	Overall Height (mm)	Load Cap. (kg)	Swivel	Swivel Brake	Fixed
75	22	Roller	75x 60	55x42	32	95	50	LSV075RMB	LSV075RMBBR	LFV075RMB
100	24	Roller	102x84	80x60	34	128	70	LSV100RMB	LSV100RMBBR	LFV100RMB
125	24	Roller	102x84	80x60	34	155	100	LSV125RMB	LSV125RMBBR	LFV125RMB
160	22	Roller	135x110	105x80	48	190	160	LSV160RMB	LSV160RMBBR	LFV160RMB
200	30	Roller	135x110	105x80	58	235	205	LSV200RMB	LSV200RMBBR	LFV200RMB



White Polypropylene

Wheel Dia. (mm)	Tread Width (mm)	Bearing Type	Bolt Holes (mm)	Offset (mm)	Overall Height (mm)	Load Cap. (kg)	Swivel	Swivel Brake
50	20	Plain	10	23	72	50	LSV050PPBH	LSV050PPBHBR
75	20	Plain	10	30	100	70	LSV075PPBH	LSV075PPBHBR
100	20	Plain	12	38	135	80	LSV100PPBH	LSV100PPBHBR
125	24	Plain	12	38	155	125	LSV125PPBH	LSV125PPBHBR



Grey Rubber Tyre / Polypropylene Centre

Wheel Dia. (mm)	Tread Width (mm)	Bearing Type	Bolt Holes (mm)	Offset (mm)	Overall Height (mm)	Load Cap. (kg)	Swivel	Swivel Brake
50	18	Plain	10	23	72	50	LSV050RPBH	LSV050RPBHBR
75	21	Plain	10	30	100	70	LSV075RPBH	LSV075RPBHBR
100	27	Plain	12	38	135	80	LSV100RPBH	LSV100RPBHBR
125	27	Plain	12	38	155	100	LSV125RPBH	LSV125RPBHBR



MDZ Series

Medium Duty Pressed Steel Castor

- Load capacities from 50kg up to 350kg
- Wheel sizes from 80mm to 200mm
- Double ball race swivel head
- Total stop brake

All available in the following types



White Nylon

Wheel Dia. (mm)	Tread Width (mm)	Bearing Type	Top Plate (mm)	Bolt Holes (mm)	Suit Bolt (mm)	Offset (mm)	Overall Height (mm)	Load Cap. (kg)	Swivel	Swivel Brake	Fixed
80	34	Roller	105x80	80x60	8	36	100	150	MSZ080NY1B	MBZ080NY1B	MFZ080NY1B
100	36	Roller	105x80	80x60	8	Swvl 36 / Brk 40	125	200	MSZ100NY1B	MBZ100NY1B	MFZ100NY1B
125	40	Roller	105x80	80x60	8	Swvl 36 / Brk 40	155	250	MSZ125NY1B	MBZ125NY1B	MFZ125NY1B
160	40	Roller	135x110	105x80	10	Swvl 52 / Brk 60	190	300	MSZ160NY1B	MBZ160NY1B	MFZ160NY1B
200	46	Roller	135x110	105x80	10	Swvl 54 / Brk 60	235	350	MSZ200NY1B	MBZ200NY1B	MFZ200NY1B



Grey Rubber Tyre / Polypropylene Centre

Wheel Dia. (mm)	Tread Width (mm)	Bearing Type	Top Plate (mm)	Bolt Holes (mm)	Suit Bolt (mm)	Offset (mm)	Overall Height (mm)	Load Cap. (kg)	Swivel	Swivel Brake	Fixed
80	30	Roller	105x80	80x60	8	36	100	50	MSZ080GRP1B	MBZ080GRP1B	MFZ080GRP1B
100	30	Roller	105x80	80x60	8	Swvl 36 / Brk 40	125	70	MSZ100GRP1B	MBZ100GRP1B	MFZ100GRP1B
125	38	Roller	105x80	80x60	8	Swvl 36 / Brk 40	155	100	MSZ125GRP1B	MBZ125GRP1B	MFZ125GRP1B
160	40	Roller	135x110	105x80	10	Swvl 52 / Brk 60	190	140	MSZ160GRP1B	MBZ160GRP1B	MFZ160GRP1B
200	50	Roller	135x110	105x80	10	Swvl 54 / Brk 60	235	205	MSZ200GRP1B	MBZ200GRP1B	MFZ200GRP1B



Black Rubber Tyre / Polypropylene Centre

Wheel Dia. (mm)	Tread Width (mm)	Bearing Type	Top Plate (mm)	Bolt Holes (mm)	Suit Bolt (mm)	Offset (mm)	Overall Height (mm)	Load Cap. (kg)	Swivel	Swivel Brake	Fixed
80	30	Roller	105x80	80x60	8	36	100	50	MSZ080BRP1B	MBZ080BRP1B	MFZ080BRP1B
100	30	Roller	105x80	80x60	8	Swvl 36 / Brk 40	125	70	MSZ100BRP1B	MBZ100BRP1B	MFZ100BRP1B
125	38	Roller	105x80	80x60	8	Swvl 36 / Brk 40	155	100	MSZ125BRP1B	MBZ125BRP1B	MFZ125BRP1B
160	40	Roller	135x110	105x80	10	Swvl 52 / Brk 60	190	140	MSZ160BRP1B	MBZ160BRP1B	MFZ160BRP1B
200	50	Roller	135x110	105x80	10	Swvl 54 / Brk 60	235	205	MSZ200BRP1B	MBZ200BRP1B	MFZ200BRP1B



Blue Elastic Rubber Tyre / Nylon Centre

Wheel Dia. (mm)	Tread Width (mm)	Bearing Type	Top Plate (mm)	Bolt Holes (mm)	Suit Bolt (mm)	Offset (mm)	Overall Height (mm)	Load Cap. (kg)	Swivel	Swivel Brake	Fixed
80	35	Roller	105x80	80x60	8	36	100	130	MSZ080RN1B	MBZ080RN1B	MFZ080RN1B
100	36	Roller	105x80	80x60	8	Swvl 36 / Brk 40	125	180	MSZ100RN1B	MBZ100RN1B	MFZ100RN1B
125	36	Roller	105x80	80x60	8	Swvl 36 / Brk 40	155	230	MSZ125RN1B	MBZ125RN1B	MFZ125RN1B
160	48	Roller	135x110	105x80	10	Swvl 52 / Brk 60	190	300	MSZ160RN1B	MBZ160RN1B	MFZ160RN1B
200	48	Roller	135x110	105x80	10	Swvl 54 / Brk 60	235	350	MSZ200RN1B	MBZ200RN1B	MFZ200RN1B



Red Polyurethane Tyre / Nylon Centre

Wheel Dia. (mm)	Tread Width (mm)	Bearing Type	Top Plate (mm)	Bolt Holes (mm)	Suit Bolt (mm)	Offset (mm)	Overall Height (mm)	Load Cap. (kg)	Swivel	Swivel Brake	Fixed
80	33	Roller	105x80	80x60	8	36	100	150	MSZ080PN1B	MBZ080PN1B	MFZ080PN1B
100	33	Roller	105x80	80x60	8	Swvl 36 / Brk 40	125	180	MSZ100PN1B	MBZ100PN1B	MFZ100PN1B
125	35	Roller	105x80	80x60	8	Swvl 36 / Brk 40	155	250	MSZ125PN1B	MBZ125PN1B	MFZ125PN1B
160	40	Roller	135x110	105x80	10	Swvl 52 / Brk 60	190	300	MSZ160PN1B	MBZ160PN1B	MFZ160PN1B
200	46	Roller	135x110	105x80	10	Swvl 54 / Brk 60	235	350	MSZ200PN1B	MBZ200PN1B	MFZ200PN1B



Midlands: 0121 772 1010

4

Northern: 0161 865 3800

MDZH Series

Medium Duty Pressed Steel Castor

- Load capacities from 50kg up to 350kg
- Total stop brake
- Double ball race swivel head
- [10] denotes available with 10mm single bolt hole
- See page 30 for expander fittings

All available in the following types



White Nylon

Wheel Dia. (mm)	Tread Width (mm)	Bearing Type	Bolt Hole Size (mm)	Offset (mm)	Overall height (mm)	Load Cap. (kg)	Swivel	Swivel Brake
80	34	Roller	13 [10.5]	36	99	150	MSZH080NY1B [10]	MBZH080NY1B [10]
100	36	Roller	13 [10.5]	Swvl 36 / Brk 40	124	200	MSZH100NY1B [10]	MBZH100NY1B [10]
125	40	Roller	13	Swvl 36 / Brk 40	154	250	MSZH125NY1B	MBZH125NY1B
160	40	Roller	16.8	Swvl 52 / Brk 60	185	300	MSZH160NY1B	MBZH160NY1B
200	46	Roller	16.8	Swvl 54 / Brk 60	230	350	MSZH200NY1B	MBZH200NY1B



Grey Rubber Tyre / Polypropylene Centre

Wheel Dia. (mm)	Tread Width (mm)	Bearing Type	Bolt Hole Size (mm)	Offset (mm)	Overall height (mm)	Load Cap. (kg)	Swivel	Swivel Brake
80	30	Roller	13 [10.5]	36	99	50	MSZH080GRP1B [10]	MBZH080GRP1B [10]
100	30	Roller	13 [10.5]	Swvl 36 / Brk 40	124	70	MSZH100GRP1B [10]	MBZH100GRP1B [10]
125	38	Roller	13	Swvl 36 / Brk 40	154	100	MSZH125GRP1B	MBZH125GRP1B
160	40	Roller	16.8	Swvl 52 / Brk 60	185	140	MSZH160GRP1B	MBZH160GRP1B
200	50	Roller	16.8	Swvl 54 / Brk 60	230	205	MSZH200GRP1B	MBZH200GRP1B



Black Rubber Tyre / Polypropylene Centre

Wheel Dia. (mm)	Tread Width (mm)	Bearing Type	Bolt Hole Size (mm)	Offset (mm)	Overall height (mm)	Load Cap. (kg)	Swivel	Swivel Brake
80	30	Roller	13 [10.5]	36	99	50	MSZH080BRP1B [10]	MBZH080BRP1B [10]
100	30	Roller	13 [10.5]	Swvl 36 / Brk 40	124	70	MSZH100BRP1B [10]	MBZH100BRP1B [10]
125	38	Roller	13	Swvl 36 / Brk 40	154	100	MSZH125BRP1B	MBZH125BRP1B
160	40	Roller	16.8	Swvl 52 / Brk 60	185	140	MSZH160BRP1B	MBZH160BRP1B
200	50	Roller	16.8	Swvl 54 / Brk 60	230	205	MSZH200BRP1B	MBZH200BRP1B



Blue Elastic Rubber Tyre / Nylon Centre

Wheel Dia. (mm)	Tread Width (mm)	Bearing Type	Bolt Hole Size (mm)	Offset (mm)	Overall height (mm)	Load Cap. (kg)	Swivel	Swivel Brake
80	35	Roller	13 [10.5]	36	99	130	MSZH080RN1B [10]	MBZH080RN1B [10]
100	36	Roller	13 [10.5]	Swvl 36 / Brk 40	124	180	MSZH100RN1B [10]	MBZH100RN1B [10]
125	36	Roller	13	Swvl 36 / Brk 40	154	230	MSZH125RN1B	MBZH125RN1B
160	48	Roller	16.8	Swvl 52 / Brk 60	185	300	MSZH160RN1B	MBZH160RN1B
200	48	Roller	16.8	Swvl 54 / Brk 60	230	350	MSZH200RN1B	MBZH200RN1B



Red Polyurethane Tyre / Nylon Centre

Wheel Dia. (mm)	Tread Width (mm)	Bearing Type	Bolt Hole Size (mm)	Offset (mm)	Overall height (mm)	Load Cap. (kg)	Swivel	Swivel Brake
80	33	Roller	13 [10.5]	36	99	150	MSZH080PN1B [10]	MBZH080PN1B [10]
100	33	Roller	13 [10.5]	Swvl 36 / Brk 40	124	180	MSZH100PN1B [10]	MBZH100PN1B [10]
125	35	Roller	13	Swvl 36 / Brk 40	154	250	MSZH125PN1B	MBZH125PN1B
160	40	Roller	16.8	Swvl 52 / Brk 60	185	300	MSZH160PN1B	MBZH160PN1B
200	46	Roller	16.8	Swvl 54 / Brk 60	230	350	MSZH200PN1B	MBZH200PN1B



MSS Series

Medium Duty Stainless Steel Castor

- Load capacities from 120kg up to 300kg
- Wheel sizes from 80mm to 200mm
- Strong stainless steel bracket
- Double ball race swivel head

All available in the following types

Top Plate



Bolt Hole



Wheel bearing Key

Plain bearing

Roller bearing

White Nylon

Top plate	Wheel Dia. (mm)	Tread Width (mm)	Bearing Type	Top Plate (mm)	Bolt Holes (mm)	Offset (mm)	Total Height (mm)	Load Cap. (kg)	Swivel	Swivel Brake	Fixed
	80	30	Plain	100x85	80x60	37	107	150	MSS080NY	MSS080NYBR	MFS080NY
	100	30	Plain	100x85	80x60	37	128	150	MSS100NY	MSS100NYBR	MFS100NY
	125	40	Plain	100x85	80x60	42	155	150	MSS125NY	MSS125NYBR	MFS125NY
	160	40	Plain	140x110	105x80	55	197	300	MSS160NY	MSS160NYBR	MFS160NY
	200	50	Plain	140x110	105x80	55	235	300	MSS200NY	MSS200NYBR	MFS200NY

Bolt hole	Wheel Dia. (mm)	Tread Width (mm)	Bolt Hole (mm)	Offset (mm)	Overall Height (mm)	Load Cap. (kg)	Swivel	Swivel Brake	Swivel	Swivel Brake
	80	30	12	37	105	150	MSS080NYBH	MSS080NYBHBR	MSS080NYBBH	MSS080NYBBHBR
	100	30	12	37	126	150	MSS100NYBH	MSS100NYBHBR	MSS100NYBBH	MSS100NYBBHBR
	125	40	12	42	150	150	MSS125NYBH	MSS125NYBHBR	MSS125NYBBH	MSS125NYBBHBR
	150	40	12	45	178	200	MSS150NYBH	MSS150NYBHBR	MSS150NYBBH	MSS150NYBBHBR
	160	40	16	55	194	300	MSS160NYBH	MSS160NYBHBR	MSS160NYBBH	MSS160NYBBHBR
	200	50	16	55	232	300	MSS200NYBH	MSS200NYBHBR	MSS200NYBBH	MSS200NYBBHBR



Polyurethane Tyre / Nylon Centre

Top plate	Wheel Dia. (mm)	Tread Width (mm)	Top Plate (mm)	Bolt Holes (mm)	Offset (mm)	Total Height (mm)	Load Cap. (kg)	Swivel	Swivel Brake	Fixed	Swivel	Swivel Brake	Fixed
	80	30	100x85	80x60	37	107	120	MSS080PN	MSS080PNBR	MFS080PN	MSS080PNB	MSS080PNBBR	MFS080PNB
	100	30	100x85	80x60	37	128	150	MSS100PN	MSS100PNBR	MFS100PN	MSS100PNB	MSS100PNBBR	MFS100PNB
	125	35	100x85	80x60	42	155	150	MSS125PN	MSS125PNBR	MFS125PN	MSS125PNB	MSS125PNBBR	MFS125PNB
	150	40	100x85	80x60	45	181	150	MSS150PN	MSS150PNBR	MFS150PN	MSS150PNB	MSS150PNBBR	MFS150PNB
	200	50	140x110	105x80	55	235	300	MSS200PN	MSS200PNBR	MFS200PN	MSS200PNB	MSS200PNBBR	MFS200PNB

Bolt hole	Wheel Dia. (mm)	Tread Width (mm)	Bolt Hole (mm)	Offset (mm)	Overall Height (mm)	Load Cap. (kg)	Swivel	Swivel Brake	Swivel	Swivel Brake
	80	30	12	37	105	120	MSS080PNBH	MSS080PNBHBR	MSS080PNBBH	MSS080PNBBHBR
	100	30	12	37	126	150	MSS100PNBH	MSS100PNBHBR	MSS100PNBBH	MSS100PNBBHBR
	125	35	12	42	150	150	MSS125PNBH	MSS125PNBHBR	MSS125PNBBH	MSS125PNBBHBR
	150	40	12	45	178	150	MSS150PNBH	MSS150PNBHBR	MSS150PNBBH	MSS150PNBBHBR
	200	50	16	55	232	300	MSS200PNBH	MSS200PNBHBR	MSS200PNBBH	MSS200PNBBHBR



Blue Rubber Tyre / Nylon Centre

Top plate	Wheel Dia. (mm)	Tread Width (mm)	Bearing Type	Top Plate (mm)	Bolt Holes (mm)	Offset (mm)	Overall Height (mm)	Load Cap. (kg)	Swivel	Swivel Brake	Fixed
	80	36	Roller	100x85	80x60	37	107	120	MSS080RNB	MSS080RNBRR	MFS080RNB
	100	36	Roller	100x85	80x60	37	128	150	MSS100RNB	MSS100RNBRR	MFS100RNB
	125	36	Roller	100x85	80x60	42	155	150	MSS125RNB	MSS125RNBRR	MFS125RNB
	160	50	Roller	140x110	105x80	55	197	300	MSS160RNB	MSS160RNBRR	MFS160RNB
	200	50	Roller	140x110	105x80	55	235	300	MSS200RNB	MSS200RNBRR	MFS200RNB

Bolt hole	Wheel Dia. (mm)	Tread Width (mm)	Bearing Type	Bolt Hole (mm)	Offset (mm)	Overall Height (mm)	Load Cap. (kg)	Swivel	Swivel Brake
	100	36	Roller	12	37	126	150	MSS100RNBH	MSS100RNBHBR
	125	36	Roller	12	42	150	150	MSS125RNBH	MSS125RNBHBR
	160	50	Roller	16	55	194	300	MSS160RNBH	MSS160RNBHBR
	200	50	Roller	16	55	232	300	MSS200RNBH	MSS200RNBHBR



MSK Series

Medium Heavy Duty Pressed Steel Castor

- Load capacities from 150kg up to 600kg
- Wheel sizes from 100mm to 200mm
- Heavy duty pressed steel bracket
- Double ball race swivel head

All available in the following types



White Nylon

Wheel Dia. (mm)	Tread Width (mm)	Bearing Type	Top Plate (mm)	Bolt Holes (mm)	Offset (mm)	Overall Height (mm)	Load Cap. (kg)	Swivel	Swivel Brake	Fixed
100	34	Plain	105x85	80x60	45	130	250	MSK100NY	MSK100NYBR	MFK100NY
100	34	Roller	105x85	80x60	45	130	250	MSK100NY1B	MSK100NY1BBR	MFK100NY1B
100	40	Ball	105x85	80x60	45	130	300	MSK100NY2B	MSK100NY2BBR	MFK100NY2B
125	35	Plain	105x85	80x60	45	157	250	MSK125NY	MSK125NYBR	MFK125NY
125	40	Roller	105x85	80x60	45	157	250	MSK125NY1B	MSK125NY1BBR	MFK125NY1B
125	40	Ball	105x85	80x60	45	157	300	MSK125NY2B	MSK125NY2BBR	MFK125NY2B
160	40	Plain	137x105	105x80	55	200	500	MSK160NY	MSK160NYBR	MFK160NY
160	40	Roller	137x105	105x80	55	200	400	MSK160NY1B	MSK160NY1BBR	MFK160NY1B
160	50	Ball	137x105	105x80	55	200	500	MSK160NY2B	MSK160NY2BBR	MFK160NY2B
200	46	Plain	137x105	105x80	55	240	500	MSK200NY	MSK200NYBR	MFK200NY
200	50	Roller	137x105	105x80	55	240	500	MSK200NY1B	MSK200NY1BBR	MFK200NY1B
200	50	Ball	137x105	105x80	55	240	550	MSK200NY2B	MSK200NY2BBR	MFK200NY2B



Blue Rubber Tyre / Nylon Centre

Wheel Dia. (mm)	Tread Width (mm)	Bearing Type	Top Plate (mm)	Bolt Holes (mm)	Offset (mm)	Overall Height (mm)	Load Cap. (kg)	Swivel	Swivel Brake	Fixed
100	35	Roller	105x85	80x60	45	130	150	MSK100RN1B	MSK100RN1BBR	MFK100RN1B
125	40	Roller	105x85	80x60	45	157	250	MSK125RN1B	MSK125RN1BBR	MFK125RN1B
160	50	Ball	137x105	105x80	55	200	300	MSK160RN2B	MSK160RN2BBR	MFK160RN2B
200	50	Ball	137x105	105x80	55	240	400	MSK200RN2B	MSK200RN2BBR	MFK200RN2B



Polyurethane Tyre / Nylon Centre

Wheel Dia. (mm)	Tread Width (mm)	Bearing Type	Top Plate (mm)	Bolt Holes (mm)	Offset (mm)	Overall Height (mm)	Load Cap. (kg)	Swivel	Swivel Brake	Fixed
100	35	Roller	105x85	80x60	45	130	150	MSK100PN1B	MSK100PN1BBR	MFK100PN1B
125	30	Roller	105x85	80x60	45	157	250	MSK125PN1B	MSK125PN1BBR	MFK125PN1B
160	40	Roller	137x105	105x80	55	200	400	MSK160PN1B	MSK160PN1BBR	MFK160PN1B
160	50	Ball	137x105	105x80	55	200	450	MSK160PN2B	MSK160PN2BBR	MFK160PN2B
200	50	Roller	137x105	105x80	55	240	500	MSK200PN1B	MSK200PN1BBR	MFK200PN1B
200	50	Ball	137x105	105x80	55	240	600	MSK200PN2B	MSK200PN2BBR	MFK200PN2B



Polyurethane Tyre / Aluminium Centre

Wheel Dia. (mm)	Tread Width (mm)	Bearing Type	Top Plate (mm)	Bolt Holes (mm)	Offset (mm)	Overall Height (mm)	Load Cap. (kg)	Swivel	Swivel Brake	Fixed
160	50	Ball	137x 105	105X80	55	200	500	MSK160PA2B	MSK160PA2BBR	MFK160PA2B



Polyurethane Tyre / Cast Iron Centre

Wheel Dia. (mm)	Tread Width (mm)	Bearing Type	Top Plate (mm)	Bolt Holes (mm)	Offset (mm)	Overall Height (mm)	Load Cap. (kg)	Swivel	Swivel Brake	Fixed
100	40	Ball	105x85	80x60	45	130	300	MSK100PC2B	MSK100PC2BBR	MFK100PC2B
125	40	Ball	105x85	80x60	45	157	300	MSK125PC2B	MSK125PC2BBR	MFK125PC2B
160	50	Ball	137x105	105x80	55	200	600	MSK160PC2B	MSK160PC2BBR	MFK160PC2B
200	50	Ball	137x105	105x80	55	240	600	MSK200PC2B	MSK200PC2BBR	MFK200PC2B



MDX Series

High Temperature Pressed Steel Castor

- Load capacities: 100kg - 300kg
- Wheel sizes: 80mm - 200mm
- Temperature rating: -40 deg.C - +280 deg.C
- Use an ACZ500 to reduce the 12mm Single Bolt to a 10mm. See page 17 (Expander Tube Fittings) for details

All available in the following types

Top Plate



Bolt Hole



Phenolic Resin Wheel

Top plate	Wheel Dia. (mm)	Tread Width (mm)	Bearing Type	Top Plate (mm)	Offset (mm)	Overall Height(mm)	Load Cap. (kg)	Swivel	Swivel Brake	Fixed
	80	35	Plain	100x85	37	108	100	MSX080HT	MSX080HTBR	MF080HT
	100	35	Plain	100x85	37	128	120	MSX100HT	MSX100HTBR	MF100HT
	125	40	Plain	100x85	42	153	170	MSX125HT	MSX125HTBR	MF125HT
	160	50	Plain	140x110	55	197	250	MSX160HT	MSX160HTBR	MF160HT
	200	50	Plain	140x110	55	235	300	MSX200HT	MSX200HTBR	MF200HT
Bolt hole	Wheel Dia. (mm)	Tread Width (mm)	Bearing Type	Bolt Hole (mm)	Offset (mm)	Overall Height(mm)	Load Cap. (kg)	Swivel	Swivel Brake	
	80	35	Plain	12	37	106	100	MSX080HTBH	MSX080HTBHBR	
	100	35	Plain	12	37	126	120	MSX100HTBH	MSX100HTBHBR	
	125	40	Plain	12	42	150	170	MSX125HTBH	MSX125HTBHBR	
	160	50	Plain	16	55	194	250	MSX160HTBH	MSX160HTBHBR	
	200	50	Plain	16	55	232	300	MSX200HTBH	MSX200HTBHBR	

Teflon Bush

Available On Request

Suits wheel Sizes	Code
80mm - 100mm	TFLN80100
125mm	N/A
160mm - 200mm	TFLN160200

With **10,000+** products in stock we have the castor for every requirement

To find the right one for you visit

www.keystonecastors.co.uk

Or call technical sales on

0121 772 1010



- All specifications and recommendations are given to the best of our knowledge and ability. No liability is accepted for their application
- Measurements are in millimetres and load ratings are in kilograms unless otherwise stated
- Specifications (by dimension, description, illustration or otherwise) are approximate and are liable to change without notice especially with regard to developments and improvements
- Listing of goods does not necessarily imply that they are 'Ex stock' nor do we accept any obligation to supply them

KP Series

Heavy Duty Pressed Steel Castor

- Double ball race
- Load capacities from 200kg to 800kg
- Heavy duty pressed steel bracket
- Available with directional locks & footguards

All available in the following types



Swivel



Swivel Brake



Fixed

White Nylon

Wheel Dia. (mm)	Tread Width (mm)	Bearing Type	Top Plate (mm)	Bolt Holes (mm)	Suit Bolt (mm)	Offset (mm)	Overall Height (mm)	Load Cap. (kg)	Swivel	Swivel Brake	Fixed
125	45	Ball	135x110	105x80	12	45	166	400	KS125NYBJ400	KS125NYBJ400SWB	KF125NYBJ400
160	50	Ball	135x110	105x80	12	57	216	500	KS160NYBJ500	KS160NYBJ500SWB	KF160NYBJ500
200	57	Ball	135x110	105x80	12	57	251	800	KS200NYBJ800	KS200NYBJ800SWB	KF200NYBJ800



Elastic Rubber / Aluminium Centre

Wheel Dia. (mm)	Tread Width (mm)	Bearing Type	Top Plate (mm)	Bolt Holes (mm)	Suit Bolt (mm)	Offset (mm)	Overall Height (mm)	Load Cap. (kg)	Swivel	Swivel Brake	Fixed
125	40	Ball	135x110	105x80	12	45	166	200	KS125EAB200	KS125EAB200SWB	KF125EAB200
160	50	Ball	135x110	105x80	12	57	216	300	KS160EAB330	KS160EAB330SWB	KF160EAB330
200	50	Ball	135x110	105x80	12	57	251	400	KS200EAB400	KS200EAB400SWB	KF200EAB400



Polyurethane Tyre / Aluminium Centre

Wheel Dia. (mm)	Tread Width (mm)	Bearing Type	Top Plate (mm)	Bolt Holes (mm)	Suit Bolt (mm)	Offset (mm)	Overall Height (mm)	Load Cap. (kg)	Swivel	Swivel Brake	Fixed
125	40	Ball	135x110	105x80	12	45	166	300	KS125PAB300	KS125PAB300SWB	KF125PAB300
160	50	Ball	135x110	105x80	12	57	216	500	KS160PAB500	KS160PAB500SWB	KF160PAB500
200	50	Ball	135x110	105x80	12	57	251	800	KS200PAB800	KS200PAB800SWB	KF200PAB800



Polyurethane Tyre / Cast Iron Centre

Wheel Dia. (mm)	Tread Width (mm)	Bearing Type	Top Plate (mm)	Bolt Holes (mm)	Suit Bolt (mm)	Offset (mm)	Overall Height (mm)	Load Cap. (kg)	Swivel	Swivel Brake	Fixed
125	40	Ball	135x110	105x80	12	45	166	400	KS125PCB400	KS125PCB400SWB	KF125PCB400
150	40	Ball	135x110	105x80	12	50	189	500	KS150PCB500	KS150PCB500SWB	KF150PCB500
160	50	Ball	135x110	105x80	12	57	216	500	KS160PCB500	KS160PCB500SWB	KF160PCB500
200	50	Ball	135x110	105x80	12	57	251	800	KS200PCB800	KS200PCB800SWB	KF200PCB800



NEW

One way RETROFIT Directional lock available on 160mm and 200mm versions

Request part number KP160200DLOCK

Foot Guards available on request

KGHP Series

Heavy Duty Pressed Steel Castor

- Load capacities from 700kg up to 900kg
- Wheel sizes from 150mm to 200mm
- Precision double ball race swivel head
- Total stop brake
- Powder coated for protection
- Low Running Noise
- Temperature Range -10°C to +90°C
- Tread Hardness: 95 Shore A.

All available in the following types

Top Plate



Polyurethane Tyre/Aluminium Centre

Wheel Dia. (mm)	Tread Width (mm)	Bearing Type	Top Plate (mm)	Bolt Holes (mm)	Suit Bolt (mm)	Offset (mm)	Overall Height (mm)	Load Cap. (kg)	Swivel	Swivel Brake	Fixed
150	50	Ball Bearing	140x110	105x80 / 105x75	10	65	200	700	KGHP150ASFMUD	KGHP150BSFMUD	KGHP150ARFMUD
175	50	Ball Bearing	140x110	105x80 / 105x75	10	60	225	800	KGHP175ASFMUD	KGHP175BSFMUD	KGHP175ARFMUD
200	50	Ball Bearing	140x110	105x80 / 105x75	10	55	250	900	KGHP200ASFMUD	KGHP200BSFMUD	KGHP200ARFMUD

Heavy Duty Castors – Precision Engineered with Silver Grey Powder Coated Frames

Discover the ultimate in durability and design with our precision-engineered Heavy Duty Castors, featuring a strong, integrated pressed steel frame and corrosion-resistant silver-grey powder coating. Built for demanding applications, these castors combine superior load capacity, long-lasting protection, and sleek aesthetics, making them the best-looking industrial castors on the market.

Why Choose Our KGHP Heavy Duty Castors?

- **Exceptional Load Capacity (700kg - 900kg):** Engineered to handle the heaviest loads with ease, ideal for industrial use.
- **Powder Coated Finish:** Superior to standard zinc-plated castors, the powder coating provides enhanced corrosion resistance and keeps your castors looking new for longer.
- **Total Stop Brake System:** A braking system locks both the wheel and swivel for maximum safety and control.
- **Quality Ball Bearings:** Low rolling resistance ensures minimal effort when moving heavy equipment.
- **Optimum Performance:** The double ball bearing race and hardened bearing seats ensure an ultra-smooth swivelling function with zero “rocking” or wobbling of the swivel head. Combined with the absence of sideways wheel movement, these features guarantee exceptional operational performance and long-lasting durability.



MG Series

Medium Heavy Duty Fabricated Steel Castor

- Load capacities from 200kg up to 600kg
- Wheel sizes from 100mm to 200mm
- Robust fabricated steel bracket
- Double ball race swivel head
- Double pedal brake
- Now available with Side Mounted Brake
- Slotted Bolt Holes: 114x87mm / 97.5x71.5mm

All available in the following types



White Nylon

Wheel Dia. (mm)	Tread Width (mm)	Bearing Type	Top Plate (mm)	Bolt Holes (mm)	Offset (mm)	Overall Height (mm)	Load Cap. (kg)	Suit Bolt. (mm)	Swivel	Swivel Brake	Fixed
100	50	Ball	140x110	105x80	35	143	300	12	KSMG100NYB	KBMG100NYB	KFMG100NYB
125	45	Ball	140x110	105x80	39	165	350	12	KSMG125NYB	KBMG125NYB	KFMG125NYB
150	50	Ball	140x110	105x80	45	190	500	12	KSMG150NYB	KBMG150NYB	KFMG150NYB
160	50	Ball	140x110	105x80	45	195	450	12	KSMG160NYB	-	KFMG160NYB
200	50	Roller	140x110	105x80	56	240	600	12	KSMG200NYB	KBMG200NYB	KFMG200NYB



Elastic Rubber Tyre/Aluminium Centre

Wheel Dia. (mm)	Tread Width (mm)	Bearing Type	Top Plate (mm)	Bolt Holes (mm)	Offset (mm)	Overall Height (mm)	Load Cap. (kg)	Suit Bolt. (mm)	Swivel	Swivel Brake	Fixed
100	40	Ball	140x110	105x80	35	143	200	12	KSMG100EAB	KBMG100EAB	KFMG100EAB
125	50	Ball	140x110	105x80	39	165	250	12	KSMG125EAB	KBMG125EAB	KFMG125EAB
150	50	Ball	140x110	105x80	45	190	300	12	KSMG150EAB	KBMG150EAB	KFMG150EAB
160	50	Ball	140x110	105x80	45	195	300	12	KSMG160EAB	-	KFMG160EAB
200	50	Ball	140x110	105x80	56	240	400	12	KSMG200EAB	KBMG200EAB	KFMG200EAB



Rubber Tyre/Cast Iron Centre

Wheel Dia. (mm)	Tread Width (mm)	Bearing Type	Top Plate (mm)	Bolt Holes (mm)	Offset (mm)	Overall Height (mm)	Load Cap. (kg)	Suit Bolt. (mm)	Swivel	Swivel Brake	Fixed
150	50	Ball	140x110	105x80	45	190	400	12	KSMG150RUB	KBMG150RUB	KFMG150RUB
200	50	Ball	140x110	105x80	56	240	500	12	KSMG200RUB	KBMG200RUB	KFMG200RUB



Polyurethane Tyre/Aluminium Centre

Wheel Dia. (mm)	Tread Width (mm)	Bearing Type	Top Plate (mm)	Bolt Holes (mm)	Offset (mm)	Overall Height (mm)	Load Cap. (kg)	Suit Bolt. (mm)	Swivel	Swivel Brake	Fixed
160	50	Ball	140x110	105x80	45	195	450	12	KSMG160PAB	-	KFMG160PAB
200	50	Ball	140x110	105x80	56	240	500	12	KSMG200PAB	KBMG200PAB	KFMG200PAB



Polyurethane Tyre/Cast Iron Centre

Wheel Dia. (mm)	Tread Width (mm)	Bearing Type	Top Plate (mm)	Bolt Holes (mm)	Offset (mm)	Overall Height (mm)	Load Cap. (kg)	Suit Bolt. (mm)	Swivel	Swivel Brake	Fixed
100	40	Ball	140x110	105x80	35	143	350	12	KSMG100PCB	KBMG100PCB	KFMG100PCB
125	50	Ball	140x110	105x80	39	165	400	12	KSMG125PCB	KBMG125PCB	KFMG125PCB
150	50	Ball	140x110	105x80	45	190	450	12	KSMG150PCB	KBMG150PCB	KFMG150PCB
160	50	Ball	140x110	105x80	45	195	450	12	KSMG160PCB	-	KFMG160PCB
200	50	Ball	140x110	105x80	56	240	500	12	KSMG200PCB	KBMG200PCB	KFMG200PCB



Cast Iron

Wheel Dia. (mm)	Tread Width (mm)	Bearing Type	Top Plate (mm)	Bolt Holes (mm)	Offset (mm)	Overall Height (mm)	Load Cap. (kg)	Suit Bolt. (mm)	Swivel	Swivel Brake	Fixed
100	50	Roller	140x110	105x80	35	143	350	12	KSMG100CIB	KBMG100CIB	KFMG100CIB
125	40	Ball	140x110	105x80	39	165	400	12	KSMG125CIB	KBMG125CIB	KFMG125CIB
150	45	Ball	140x110	105x80	45	190	450	12	KSMG150CIB	KBMG150CIB	KFMG150CIB
200	45	Ball	140x110	105x80	56	240	600	12	KSMG200CIB	KBMG200CIB	KFMG200CIB



HK Series

Heavy Duty Fabricated Steel Castor

- Load capacities from 250kg up to 1300kg
- Wheel sizes from 125mm to 300mm
- Robust heavy duty fabricated steel bracket
- Single ball race swivel head

All available in the following types



White Nylon

Wheel Dia. (mm)	Tread Width (mm)	Bearing Type	Top Plate (mm)	Bolt Holes (mm)	Offset (mm)	Overall Height (mm)	Load Cap. (kg)	Swivel	Swivel Brake	Fixed
125	45	Ball	149x110	105x80 /120x60	45	177	400	HKS12520111	HKB12520111	HKF12520111
150	50	Ball	149x110	105x80 /120x60	49	202	750	HKS15020111	HKB15020111	HKF15020111
200	50	Ball	149x110	105x80 /120x60	54	252	1100	HKS20020111	HKB20020111	HKF20020111
250	50	Ball	149x110	105x80 /120x60	70	303	1300	HKS25025111	HKB25025111	HKF25025111



Elastic Rubber Tyre/Aluminium Centre

Wheel Dia. (mm)	Tread Width (mm)	Bearing Type	Top Plate (mm)	Bolt Holes (mm)	Offset (mm)	Overall Height (mm)	Load Cap. (kg)	Swivel	Swivel Brake	Fixed
125	50	Ball	149x110	105x80 /120x60	45	177	250	HKS12520341	HKB12520341	HKF12520341



Rubber Tyre/Cast Iron Centre

Wheel Dia. (mm)	Tread Width (mm)	Bearing Type	Top Plate (mm)	Bolt Holes (mm)	Offset (mm)	Overall Height (mm)	Load Cap. (kg)	Swivel	Swivel Brake	Fixed
150	50	Ball	149x110	105x80 /120x60	49	202	400	HKS15020341	HKB15020341	HKF15020341
200	50	Ball	149x110	105x80 /120x60	54	252	600	HKS20020341	HKB20020341	HKF20020341
250	54	Ball	149x110	105x80 /120x60	70	303	615	HKS25025341	HKB25025341	HKF25025341
300	54	Ball	149x110	105x80 /120x60	80	353	680	HKS30025341	HKB30025341	HKF30025341



Polyurethane Tyre/Cast Iron Centre

Wheel Dia. (mm)	Tread Width (mm)	Bearing Type	Top Plate (mm)	Bolt Holes (mm)	Offset (mm)	Overall Height (mm)	Load Cap. (kg)	Swivel	Swivel Brake	Fixed
125	50	Ball	149x110	105x80 /120x60	45	177	400	HKS12520241	HKB12520241	HKF12520241
150	50	Ball	149x110	105x80 /120x60	49	202	700	HKS15020241	HKB15020241	HKF15020241
200	50	Ball	149x110	105x80 /120x60	54	252	1000	HKS20020241	HKB20020241	HKF20020241
250	50	Ball	149x110	105x80 /120x60	70	303	1150	HKS25025241	HKB25025241	HKF25025241
300	50	Ball	149x110	105x80 /120x60	80	353	1300	HKS30025241	HKB30025241	HKF30025241



Cast Iron

Wheel Dia. (mm)	Tread Width (mm)	Bearing Type	Top Plate (mm)	Bolt Holes (mm)	Offset (mm)	Overall Height (mm)	Load Cap. (kg)	Swivel	Swivel Brake	Fixed
125	40	Ball	149x110	105x80 /120x60	45	177	400	HKS12520441	HKB12520441	HKF12520441
150	45	Ball	149x110	105x80 /120x60	49	202	700	HKS15020441	HKB15020441	HKF15020441
200	45	Ball	149x110	105x80 /120x60	54	252	1100	HKS20020441	HKB20020441	HKF20020441
250	54	Ball	149x110	105x80 /120x60	70	303	1150	HKS25025441	HKB25025441	HKF25025441



Midlands: 0121 772 1010

12

Northern: 0161 865 3800

HST Series

Heavy Duty Fabricated Steel Castor

- Heavy duty fabricated range
- Single ball bearing swivel head
- 4-way directional lock
- Load capacities: 300kg - 950kg

All available in the following types



Swivel Brake



Swivel



Directional Lock



Fixed

White Nylon

Wheel Dia. (mm)	Tread Width (mm)	Bearing Type	Swivel Top Plate (mm)	Fixed Top Plate (mm)	Bolt Holes (mm)	Suit Bolt (mm)	Offset (mm)	Overall Height (mm)	Load Cap. (kg)	Swivel	Directional Lock	Swivel Brake	Fixed
100	50	Ball	150x110	150x115	105x80 /120x60	12	52	154	300	HST100NY2B	HST100NY2BD	HBT100NY2B	HFT100NY2B
125	45	Ball	150x110	150x115	105x80 /120x60	12	55	179	425	HST125NY2B	HST125NY2BD	HBT125NY2B	HFT125NY2B
150	50	Ball	150x110	150x115	105x80 /120x60	12	59	204	700	HST150NY2B	HST150NY2BD	HBT150NY2B	HFT150NY2B
200	50	Ball	150x110	150x115	105x80 /120x60	12	62	254	950	HST200NY2B	HST200NY2BD	HBT200NY2B	HFT200NY2B



Rubber Tyre / Cast Iron

Wheel Dia. (mm)	Tread Width (mm)	Bearing Type	Swivel Top Plate (mm)	Fixed Top Plate (mm)	Bolt Holes (mm)	Suit Bolt (mm)	Offset (mm)	Overall Height (mm)	Load Cap. (kg)	Swivel	Directional Lock	Swivel Brake	Fixed
150	50	Ball	150x110	150x115	105x80 /120x60	12	59	204	400	HST150RU2B	HST150RU2BD	HBT150RU2B	HFT150RU2B
200	50	Ball	150x110	150x115	105x80 /120x60	12	62	254	600	HST200RU2B	HST200RU2BD	HBT200RU2B	HFT200RU2B



Polyurethane Tyre/Cast Iron Centre

Wheel Dia. (mm)	Tread Width (mm)	Bearing Type	Swivel Top Plate (mm)	Fixed Top Plate (mm)	Bolt Holes (mm)	Suit Bolt (mm)	Offset (mm)	Overall Height (mm)	Load Cap. (kg)	Swivel	Directional Lock	Swivel Brake	Fixed
100	40	Ball	150x110	150x115	105x80 /120x60	12	52	154	300	HST100PC2B	HST100PC2BD	HBT100PC2B	HFT100PC2B
125	50	Ball	150x110	150x115	105x80 /120x60	12	55	179	425	HST125PC2B	HST125PC2BD	HBT125PC2B	HFT125PC2B
150	50	Ball	150x110	150x115	105x80 /120x60	12	59	204	700	HST150PC2B	HST150PC2BD	HBT150PC2B	HFT150PC2B
200	50	Ball	150x110	150x115	105x80 /120x60	12	62	254	950	HST200PC2B	HST200PC2BD	HBT200PC2B	HFT200PC2B



Cast Iron

Wheel Dia. (mm)	Tread Width (mm)	Bearing Type	Swivel Top Plate (mm)	Fixed Top Plate (mm)	Bolt Holes (mm)	Suit Bolt (mm)	Offset (mm)	Overall Height (mm)	Load Cap. (kg)	Swivel	Directional Lock	Swivel Brake	Fixed
100	40	Ball	150x110	150x115	105x80 /120x60	12	52	154	300	HST100CI2B	HST100CI2BD	HBT100CI2B	HFT100CI2B
125	40	Ball	150x110	150x115	105x80 /120x60	12	55	179	475	HST125CI2B	HST125CI2BD	HBT125CI2B	HFT125CI2B
150	45	Ball	150x110	150x115	105x80 /120x60	12	59	204	800	HST150CI2B	HST150CI2BD	HBT150CI2B	HFT150CI2B
200	45	Ball	150x110	150x115	105x80 /120x60	12	62	254	950	HST200CI2B	HST200CI2BD	HBT200CI2B	HFT200CI2B



GXT Series

Extra Heavy Duty Fabricated Steel Castor

- Heavy duty fabricated castor
- Load capacities: 500kg - 2700kg
- Power towable to 4km/h
- Unique integrated axle means superior rolling performance and durability
- Powder coated and zinc galvanised

All available in the following types



Machine Cast Nylon

Wheel Dia. (mm)	Tread Width (mm)	Bearing Type	Top Plate (mm)	Bolt Holes (mm)	Suit Bolt (mm)	Off-set (mm)	Overall Height (mm)	Load Cap. (kg)	Swivel	Wheel Brake	Fixed
80	48	Ball	100x85	80x60	8	40	120	800	GXT80ASFMCD	GXT80BSFMCD	GXT80ARFMCD
100	48	Ball	100x85	80x60	8	40	140	900	GXT100ASFMCD	GXT100BSFMCD	GXT100ARFMCD
125	70	Ball	175x140	148x111/132x99	14	77.5	170	1500	GXT125ASFMCD	GXT125BSFMCD	GXT125ARFMCD
150	70	Ball	175x140	148x111/132x99	14	80	200	2200	GXT150ASFMCD	GXT150BSFMCD	GXT150ARFMCD
200	70	Ball	175x140	148x111/132x99	14	75	260	2500	GXT200ASFMCD	GXT200BSFMCD	GXT200ARFMCD
250	68	Ball	175x140	148x111/132x99	14	75	310	2700	GXT250ASFMCD	GXT250BSFMCD	GXT250ARFMCD



Polyurethane Tyre / Aluminium Centre

Wheel Dia. (mm)	Tread Width (mm)	Bearing Type	Top Plate (mm)	Bolt Holes (mm)	Suit Bolt (mm)	Off-set (mm)	Overall Height (mm)	Load Cap. (kg)	Swivel	Wheel Brake	Fixed
80	48	Ball	100x85	80x60	8	40	120	500	GXT80ASFHUD	GXT80BSFHUD	GXT80ARFHUD
100	48	Ball	100x85	80x60	8	40	140	600	GXT100ASFHUD	GXT100BSFHUD	GXT100ARFHUD
125	70	Ball	175x140	148x111/132x99	14	77.5	170	1100	GXT125ASFHUD	GXT125BSFHUD	GXT125ARFHUD
150	68	Ball	175x140	148x111/132x99	14	48	224	1500	GXT150ASFHUD	GXT150BSFHUD	GXT150ARFHUD
200	68	Ball	175x140	148x111/132x99	14	60	275	2000	GXT200ASFHUD	GXT200BSFHUD	GXT200ARFHUD
250	64	Ball	175x140	148x111/132x99	14	75	310	2300	GXT250ASFHUD	GXT250BSFHUD	GXT250ARFHUD



UGXT Series

Ultra Heavy Duty Fabricated Steel Castor

- Taper roller bearing in swivel head
- Load capacities: 6000kg - 8000kg
- Power towable to 4km/h
- Unique integrated axle means superior rolling performance and durability
- 4 ball bearing in wheel
- Powder coated and zinc galvanised

All available in the following types



Machine Cast Nylon

Wheel Dia. (mm)	Tread Width (mm)	Bearing Type	Top Plate (mm)	Bolt Holes (mm)	Suit Bolt (mm)	Offset (mm)	Overall Height (mm)	Load Cap. (kg)	Swivel	Wheel Brake	Fixed
200	100	Ball	255x215	210x160	18	75	280	6000	UGXT200ASFMCD	UGXT200BSFMCD	UGXT200ARFMCD
250	100	Ball	255x215	210x160	18	80	330	7000	UGXT250ASFMCD	UGXT250BSFMCD	UGXT250ARFMCD
300	100	Ball	255x215	210x160	18	90	380	8000	UGXT300ASFMCD	UGXT300BSFMCD	UGXT300ARFMCD



K2 Series

Extra Heavy Duty Twin Wheel Castor

- Wheel sizes from 125mm to 300mm
- Load capacities from 750kg to 4000kg
- Very heavy duty fabricated bracket
- Taper roller bearing in swivel head

All available in the following types



Polyurethane Tyre/Cast Centre

Wheel Dia. (mm)	Tread Width (mm)	Bearing Type	Top Plate (mm)	Bolt Holes (mm)	Offset (mm)	Overall Height (mm)	Load Cap. (kg)	Swivel	Wheel Brake	Fixed
125	40 x2	Ball	170x170	130x130	60	197	750	K2ST125PC2B	K2BT125PC2B	K2FT125PC2B
150	40 x2	Ball	170x170	130x130	60	210	1000	K2ST150PC2B	K2BT150PC2B	K2FT150PC2B
200	50 x2	Ball	200x200	160x160	72	270	2000	K2ST200PC2B	K2BT200PC2B	K2FT200PC2B
250	60 x2	Ball	230x230	190x190	80	320	2800	K2ST250PC2B	K2BT250PC2B	K2FT250PC2B
300	70 x2	Ball	230x230	190x190	83	375	4000	K2ST300PC2B	K2BT300PC2B	K2FT300PC2B

AGV-AMR Castors

Designed for optimum performance of Automated Guide Vehicles (AGV) and Autonomous Mobile Robots (AMR)

A SMART SOLUTION TO EVERY TYPICAL AGV/AMR PROBLEM



GAAD (Dual Swivel Head): Two swivel axes with different radius of rotation. Optimises the castor's offset to reduce strain on drive motor and minimise vehicle swing.



GAGD: Offset is optimised to be smaller and strengthened for durability. Thrust bearing in the swivel head for very heavy loads.



MAINTAINS FLOOR CONTACT

GASD: Special rubber cushion exerts downward force.



CAMBER ADJUSTMENT RANGE (+/-) 5 DEGREES

GATD: Wheel axle tilts freely on central axis – Widely spaced wheels allow for smaller castor offset.

Ask for our AGV-AMR Catalogue

GDS Series

Shock Absorbing Castors

- Load capacities from 40kg up to 350kg
- Wheel sizes from 50mm to 200mm
- Polyurethane Tyre / Aluminium Centre
- Shock absorption and noise reduction
- Wheel brake only on GDS Series
- Total stop brake on GDSB Series

All available in the following types



GDS – Compact (50mm - 60mm)

Wheel Dia. (mm)	Tread Width (mm)	Bearing Type	Top Plate (mm)	Bolt Holes (mm)	Suit Bolt (mm)	Offset (mm)	Overall Height (mm)	Load Cap. (kg)	Swivel	Swivel Brake	Fixed	Fixed Brake
50	23	Ball Bearing	55x55	42x42	6	30~34	100-10	40	GDS05065SF	GDS050B65SF	GDS05065RF	GDS050B65RF
65	23	Ball Bearing	55x55	42x42	6	30~36	115-10	50	GDS06565SF	GDS065B65SF	GDS06565RF	GDS065B65RF

*Elastic Polyurethane Tyre



GDS – Standard (75mm - 200mm)

Wheel Dia. (mm)	Tread Width (mm)	Bearing Type	Top Plate (mm)	Bolt Holes (mm)	Suit Bolt (mm)	Offset (mm)	Overall Height (mm)	Load Cap. (kg)	Swivel	Swivel Brake	Fixed	Fixed Brake
75	30	Ball Bearing	73x73	58x58	6	35~39	130-15	90	GDS07575SF	GDS075B75SF	GDS07575RF	GDS075B75RF
100	30	Ball Bearing	73x73	58x58	6	45~53	160-20	100	GDS10075SF	GDS100B75SF	GDS10075RF	GDS100B75RF
125	30	Ball Bearing	73x73	58x58	6	45~54	187-20	100	GDS12575SF	GDS125B75SF	GDS12575RF	GDS125B75RF
130	40	Ball Bearing	95x95	70x70	10	36~50	200-30	350	GDS13075SF	GDS130B75SF	GDS13075RF	GDS130B75RF
150	40	Ball Bearing	95x95	70x70	10	36~50	230-30	350	GDS15075SF	GDS150B75SF	GDS15075RF	GDS150B75RF
200	40	Ball Bearing	95x95	70x70	10	55~76	270-35	350	GDS20075SF	GDS200B75SF	GDS20075RF	GDS200B75RF



GDSB – Total Stop Brake* (100mm – 125mm)

Wheel Dia. (mm)	Tread Width (mm)	Bearing Type	Top Plate (mm)	Bolt Holes (mm)	Suit Bolt (mm)	Offset (mm)	Overall Height (mm)	Load Cap. (kg)	Swivel	Swivel Brake	Fixed	Fixed Brake
100	30	Ball Bearing	105x80	80x60	8	45~54	171-20	100	GDSP100ASFLUD75	GDSP100BSFLUD75	GDSP100ARFLUD75	GDSB100BRFLUD75
125	30	Ball Bearing	105x80	80x60	8	45~57	197-20	100	GDSP125ASFLUD75	GDSP125BSFLUD75	GDSP125ARFLUD75	GDSB125BRFLUD75

***Only Shock Absorbing Castor with a patented design for a Total Stop Brake.**

A Total Stop Brake locks both the swivel rotation and wheel when the brake is applied.



KGDSP Series


Shock Absorbing Castor

- Double cushioned function based on the special rubber cushion
- Power towable to 20km/h
- Load capacities: 360kg - 450kg
- Directional lock is available

Polyurethane Tyre/Aluminium Centre

Wheel Dia. (mm)	Tread Width (mm)	Bearing Type	Top Plate (mm)	Bolt Holes (mm)	Suit Bolt (mm)	Offset (mm)	Overall Height (mm)	Compression (mm)	Load Cap. (kg)	Swivel	Swivel Braked	Fixed	Fixed Brake
150	48	Ball	140x110	105x80 / 105x75	10	48-53	202 - 14	14	360	KGDSP150ASFMUD	KGDSP150BSFMUD	KGDSP150ARFMUD	KGDSP150BRFMUD
200	48	Ball	140x110	105x80 / 105x75	10	65-75	253 - 15	15	450	KGDSP200ASFMUD	KGDSP200BSFMUD	KGDSP200ARFMUD	KGDSP200BRFMUD

All available in the following types

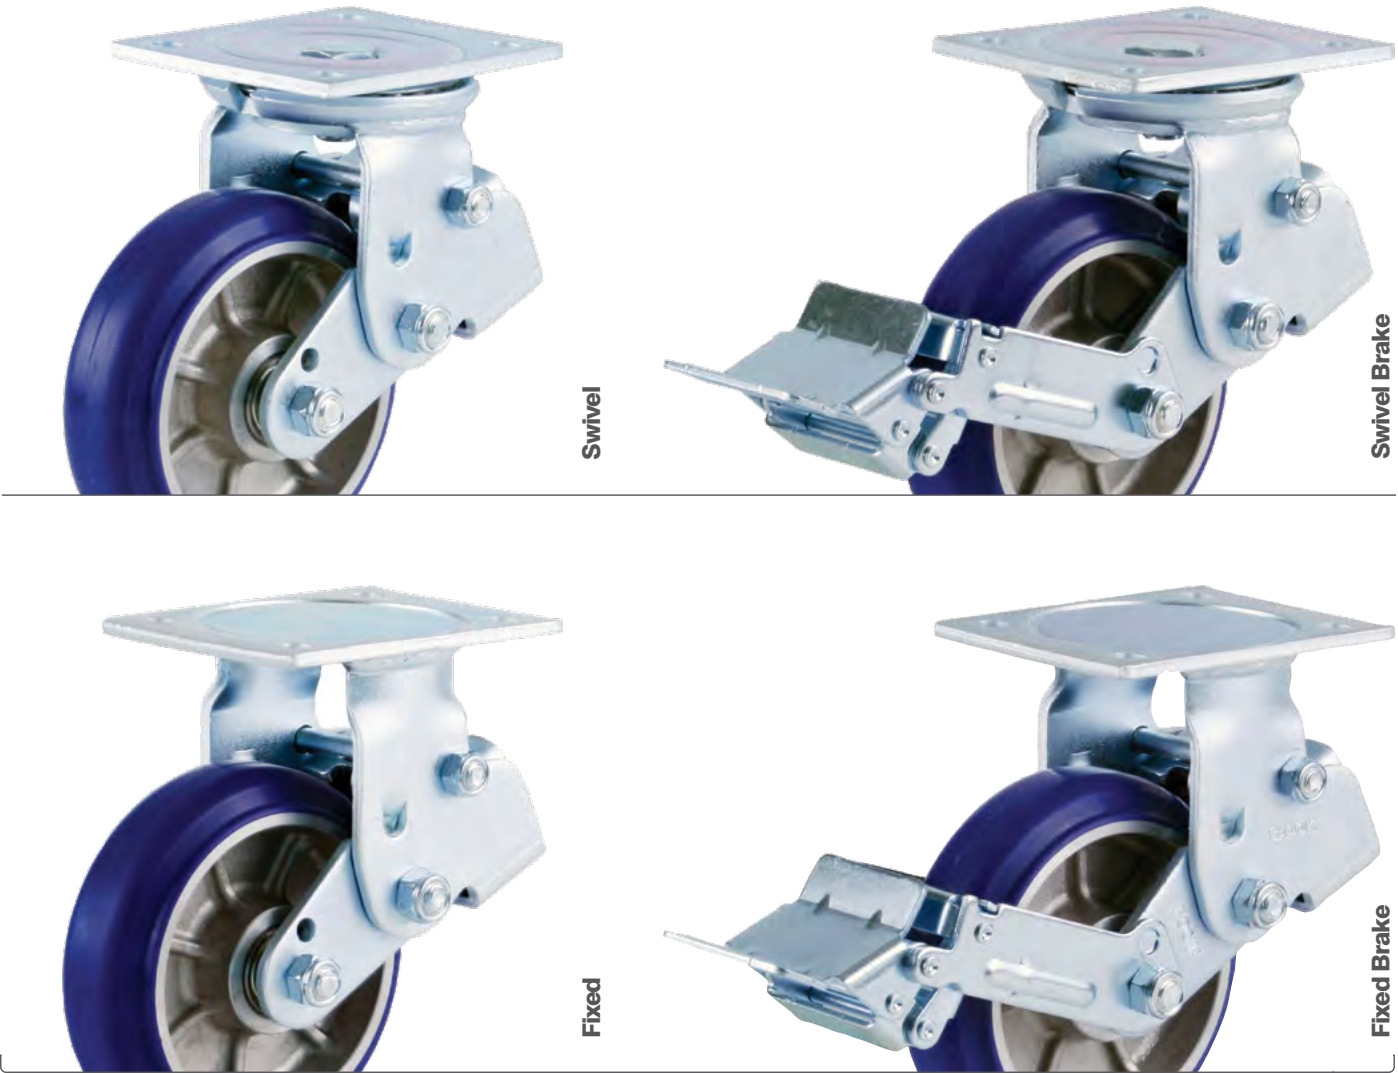

KGD Series

Footmaster Levelling Castors

- Mobility, levelling and vibration damping
- Die cast aluminium body
- Handwheel, retractable ratchet or spanner operation
- Nylon wheel

All available in the following types



Stem Fitting



Top Plate

Top Plate Fitting (Recommended Load = Load Cap. x2)

Part Num.	Load Capacity (kg)		Wheel Dia. (mm)	Tread Width (mm)	Overall Height (mm)	Offset (mm)	Method of Operation	Bolt Holes (mm)	Top Plate (mm)	Bolt Hole Size (mm)
	Static	Dynamic								
KGD-40F	60	30	42	20	71+10	30	Handwheel	42x42	55x55	6.5
KGD-60F*	280	140	50	25	82+10	36	Handwheel	58x58	73x73	7
KGD-60F-80X60	280	140	50	25	82+10	36	Handwheel	80X60	100X85	7
KGDR-60F	250	125	50	25	82+10	36	Ratchet	58x58	73x73	7
KGD-80F*	550	275	63	28	103+15	46	Handwheel	70x70	90x90	9
KGDR-80F	500	250	63	28	103+15	46	Ratchet	70x70	90x90	9
KGD-100F	800	400	75	30	120+12	53	Handwheel	70x70	95x95	11
KGD-100F-105X80	800	400	75	30	120+12	53	Handwheel	105X80	140X110	11
KGD-120F	1000	500	75	30	120+12	52	HEXADJ	70x70	95x95	11
KGD-150F	1500	750	90	55	135+15	69	HEXADJ	70x70	100x100	13

Stem Fitting (Recommended Load = Load Cap. x2)

Part Num.	Load Capacity (kg)		Wheel Dia. (mm)	Tread Width (mm)	Overall Height (mm)	Offset (mm)	Method of Operation	Bolt Thread (mm)
	Static	Dynamic						
KGD-40S	60	30	42	20	71+10	30	Handwheel	M8x1.25P
KGD-60S*	280	140	50	25	82+10	36	Handwheel	M12x1.75P
KGDR-60S	250	125	50	25	82+10	36	Ratchet	M12x1.75P
KGD-80S*	550	275	63	28	103+15	46	Handwheel	M12x1.75P
KGDR-80S	500	250	63	28	103+15	46	Ratchet	M12x1.75P
KGD-100S	800	400	75	30	120+12	53	Handwheel	M16x2.0P
KGD-120S	1000	500	75	30	120+12	52	Handwheel	M16x2.0P

* Available in stainless steel

KGDH/L Series

Footmaster Levelling Castors

- Mobility and levelling
- Die cast aluminium body
- Extra heavy duty
- Nylon wheel

All available in the following types



KGDH Series



KGD L Series

KGDH Series (Recommended Load = Load Cap. x3)

Part Num.	Load Capacity (kg)	Wheel Diameter (mm)	Tread Width (mm)	Overall Height (mm)	Offset (mm)	Stem	Bolt Holes (mm)	Top Plate (mm)	Bolt Hole Size (mm)
KGDH50ASFNYN	150	50	25	73+35	45	M10x56L	58x58	73x73	7
KGDH65ASFNYN	500	63	28	98+48	56	M16x60L	70x70	90x90	9.5
KGDH75ASFNYD	700	75	55	110+35	64	M16x60L	70x70	90x90	9.5

KGDL Series (Recommended Load = Load Cap. x3)


Part Num.	Load Capacity (kg)	Wheel Diameter (mm)	Tread Width (mm)	Overall Height (mm)	Offset (mm)	Bolt Holes (mm)	Top Plate (mm)	Bolt Hole Size (mm)
KGDL50ASFNYN	150	50	25	73+10	45	58x58	73x73	7
KGDL65ASFNYN	500	63	28	98+41	56	70x70	90x90	9.5
KGDL75ASFNYD	700	75	55	110+18	64	70x70	90x90	9.5

Castor Wheels

Nylon / Polypropylene

- Load capacities from 54kg up to 1500kg
- Wheel sizes from 50mm to 250mm
- High load capacity
- Strong & low maintenance
- Extremely resilient to salts, greases, acids and alkalis
- Economical

Bearing Types



Plain Bore




Roller Bearing



Ball Bearing

White Nylon / Polypropylene

Wheel Dia. (mm)	Tread Width (mm)	Bore Size (mm)	Hub Length (mm)	Load Cap. (kg)	Bearing Type	Type	Part Number
A	B	C	D				
50	17	6.4	27	54	Plain Bore	Nylon	WNY20
63	22	9.5	33	122	Plain Bore	Nylon	WNY25
75	25	10	30	160	Plain Bore	Nylon	075NY03
75	35	12	45	160	Plain Bore	Nylon	075NY04
75	25	12	40	170	Plain Bore	Nylon	WNY3M12
80	34	12	40	130	Roller Bearing	Nylon	MVW080NY1B
80	34	8	40	130	Ball Bearing (Single)	Nylon	MVW080NY2B
80	34	12	44.4	200	Plain Bore	Nylon	UOO0803412
100	32	12	40	125	Plain Bore	Grey Polypropylene	KW100ED1240
100	32	8	45	150	Ball Bearing	Nylon	7335070
100	36	12	40	150	Roller Bearing	Nylon	MVW100NY1B
100	36	8	40	150	Ball Bearing (Single)	Nylon	MVW100NY2B
100	32	12	45	250	Plain Bore	Nylon	KW100NY1245
100	32	12	44	270	Roller Bearing	Nylon	KW100NY1244RB
100	32	15	48	270	Plain Bore	Nylon	WNY4M15
100	32	15	48	270	Roller Bearing	Nylon	WNY4RBM15
100	40	15	40	300	Ball Bearing	Nylon	AW100NYBJ40
100	50	20	60	400	Ball Bearing	Nylon	KMW100NYBJ
125	35	8	45	150	Ball Bearing	Nylon	7335090
125	38	15	50	200	Roller Bearing	Nylon	MVW125NY1B
125	38	10	50	200	Ball Bearing (Single)	Nylon	MVW125NY2B
125	40	12	44.4	250	Roller Bearing	Nylon	UOR1254012
125	35	12	45	300	Plain Bore	Nylon	KW125NY1245
125	40	15	45	300	Ball Bearing	Nylon	AW125NYBJ
125	35	15	48	360	Plain Bore	Nylon	WNY5M15
125	35	15	48	360	Roller Bearing	Nylon	WNY5RBM15
125	45	20	49	400	Ball Bearing	Nylon	AW125NYBJ49
150	38	20	60	520	Plain Bore	Nylon	WNY6M20
150	38	20	60	520	Roller Bearing	Nylon	WNY6RBM20
150	50	20	60	800	Ball Bearing	Nylon	150NY2H
160	40	20	60	200	Plain Bore	White Polypropylene	KW160PP
160	50	20	60	300	Roller Bearing	Nylon	MVW160NY1B
160	40	20	58	400	Roller Bearing	Nylon	UOR1604020
160	50	20	55	500	Ball Bearing	Nylon	AW160NYBJ
200	50	20	60	500	Plain Bore	Nylon	200NY05
200	50	20	60	500	Roller Bearing	Nylon	200NY15
200	46	20	60	600	Roller Bearing	Nylon	KW200NY1B
200	50	20	45	550	Ball Bearing	Nylon	AW200NYBJ
200	57	25	59	800	Ball Bearing	Nylon	AW200NYBJ25
200	50	25	60	1500	Ball Bearing	Nylon	200NY2H
250	50	20	60	1320	Ball Bearing	Nylon	KW250NYBJ6020
250	50	25	60	1320	Ball Bearing	Nylon	KW250NYBJ6025
250	50	25	60	1500	Ball Bearing	Nylon	250NY2H

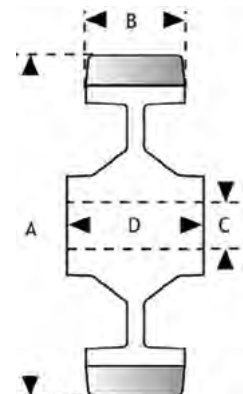

Castor Wheels

Polyurethane Tyre / Nylon Centre

- Load capacities from 100kg up to 600kg
- Wheel sizes from 80mm to 200mm
- High load capacity
- Low running noise
- Strong & wear resistant
- Extremely resilient to oils, greases, petrol, and to a wide range of chemicals

Bearing Types



Plain Bore




Roller Bearing



Ball Bearing

Polyurethane Tyre on a Nylon Centre

Wheel Dia. (mm)	Tread Width (mm)	Bore Size (mm)	Hub Length (mm)	Load Cap. (kg)	Bearing Type	Part Number	Tyre Colour	Centre Colour
A	B	C	D					
80	25	8	40	100	Ball Bearing (Single)	AW080NPB	Red	Black
80	32	12	40	150	Roller Bearing	MVW080PN1B	Red	Grey
80	38	12	44.4	150	Roller Bearing	UAR0803812GREY	Grey	Grey
100	30	8	40	125	Ball Bearing (Single)	AW100NPB	Red	Black
100	35	12	44	220	Roller Bearing	KW100PN1244RB	Red	White
100	35	12	40	220	Roller Bearing	KW100PNB1240	Red	White
100	35	15	48	220	Plain Bore	KW100PN1548	Red	White
100	35	15	48	250	Roller Bearing	WPN4RBM15	Red	Grey
125	30	10	50	150	Ball Bearing (Single)	AW125NPB	Red	Black
125	35	12	45	180	Plain Bore	125NT04	Red	White
125	35	12	45	230	Roller Bearing	AW125PN1BO	Orange	White
125	35	15	35	250	Ball Bearing	KW125PNBJ	Orange	White
125	35	15	48	300	Plain Bore	WPN5M15	Red	Grey
125	35	15	48	300	Roller Bearing	WPN5RBM15	Red	Grey
125	45	20	49	400	Ball Bearing	AW125PN2B	Brown	Black
150	37	20	60	400	Ball Bearing	AW150PNBJ	Red	White
150	45	20	58	600	Roller Bearing	WPN6KRB20	Red	White
160	40	20	58	450	Roller Bearing	AW160PN1BO	Orange	White
160	50	20	55	500	Ball Bearing	AW160PN2B	Brown	Black
200	50	20	58	600	Roller Bearing	AW200PN1BO	Orange	White
200	50	20	58	600	Ball Bearing	AW200PNBJ	Red	White
200	50	20	58	600	Roller Bearing	WPN8KRB20	Red	White
200	50	25	58	600	Ball Bearing	AW200PNBJ25	Red	White

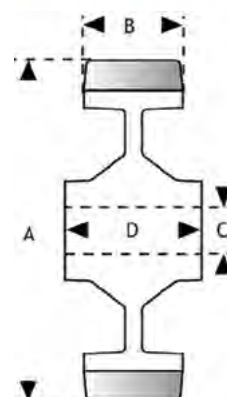

Castor Wheels

Elastic Rubber Tyre

- Load capacities from 27kg up to 550kg
- Wheel sizes from 50mm to 250mm
- Higher load capacity than normal rubber
- Strong & low-noise running
- Excellent running and operator comfort

Bearing Types



Plain Bore




Roller Bearing



Ball Bearing


Blue Elastic Rubber / Nylon Centre

Wheel Dia. (mm)	Tread Width (mm)	Bore Size (mm)	Hub Length (mm)	Load Cap. (kg)	Bearing Type	Part Number
A	B	C	D			
50	22	6.4	27	27	Plain Bore	WRN20
63	25	9.5	33	45	Plain Bore	WRN25
75	32	12	40	90	Plain Bore	WRN3M12
75	36	8	42	130	Ball Bearing	KW075RN2B
100	35	12	44.4	160	Roller Bearing	UER1003512BLUE
100	38	15	48	160	Plain Bore	WRN4M15
100	38	15	48	160	Roller Bearing	WRN4RBM15
100	36	12	40	200	Roller Bearing	AW100RNBBLUE
100	50	12	62	240	Ball Bearing	KW100RN2B
125	32	8	45	180	Ball Bearing	7335940SOVKIT
125	36	12	45	250	Roller Bearing	KJER1253612BLUE
125	36	15	50	250	Roller Bearing	KW125RN1BBLUE
150	50	20	58	300	Plain Bore	AWRN6M20
150	48	20	60	300	Roller Bearing	KWRN6RBM20
160	50	20	58	300	Roller Bearing	AW160RNBBLUE
160	50	20	60	350	Ball Bearing	KW160RN2BBLUE
200	48	20	60	400	Roller Bearing	KW200RN1BBLUE
200	50	20	60	400	Ball Bearing	KW200RN2BBLUE

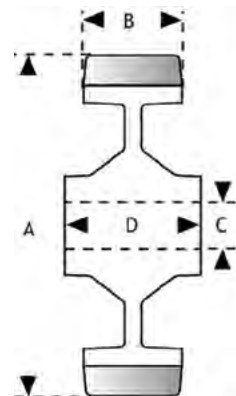

Black Elastic Rubber / Aluminium Centre

Wheel Dia. (mm)	Tread Width (mm)	Bore Size (mm)	Hub Length (mm)	Load Cap. (kg)	Bearing Type	Part Number
A	B	C	D			
100	40	12	40	160	Ball Bearing	AW100EAB12
100	40	15	40	200	Ball Bearing	KW100EAB
125	50	20	60	225	Ball Bearing	AW125EAB5020
160	50	20	60	300	Ball Bearing	KMW160EAB
200	50	20	60	450	Ball Bearing	KMW200EAB
250	50	20	60	525	Ball Bearing	AW250EAB20
250	50	20	60	550	Ball Bearing	KW250EAB25

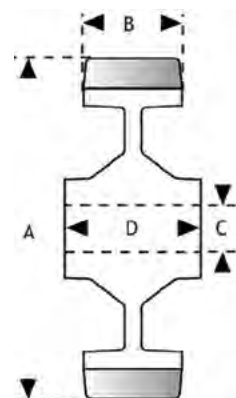

Castor Wheels


Polyurethane Tyre (Aluminium)

- Load capacities from 180kg up to 800kg
- Wheel sizes from 80mm to 200mm
- Up to 10x life of equivalent rubber tyre wheels
- Strong & low running noise
- Wear resistant
- Weigh much less than equivalent cast iron centre wheels
- Extremely resilient to oils, greases, petrol, and to a wide range of chemicals



Polyurethane Tyre / Aluminium Centre

Wheel Dia. (mm)	Tread Width (mm)	Bore Size (mm)	Hub Length (mm)	Load Cap. (kg)	Bearing Type	Part Number
A	B	C	D			
80	30	12	40	180	Ball Bearing	AW080PAB
100	40	12	40	250	Ball Bearing	AW100PAB
100	38	15	40	300	Ball Bearing	KW100PA2B
125	30	15	30	250	Ball Bearing	AW125PAB
125	40	20	50	300	Ball Bearing	AW125PAB5020
125	38	15	45	350	Ball Bearing	KW125PA2B
150	40	20	40	400	Ball Bearing	AW150PAB40
150	50	20	60	500	Ball Bearing	KW150PA2B
160	50	20	60	600	Ball Bearing	KW160PA2B
200	50	20	60	800	Ball Bearing	KW200PA2B

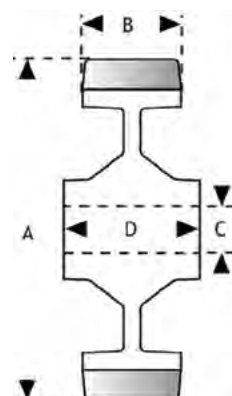

With **10,000+** products in stock we have the castor for every requirement

To find the right one for you visit

www.keystonecastors.co.uk

Or call technical sales on

0121 772 1010




- All specifications and recommendations are given to the best of our knowledge and ability. No liability is accepted for their application
- Measurements are in millimetres and load ratings are in kilograms unless otherwise stated
- Specifications (by dimension, description, illustration or otherwise) are approximate and are liable to change without notice especially with regard to developments and improvements
- Listing of goods does not necessarily imply that they are 'Ex stock' nor do we accept any obligation to supply them

Castor Wheels

Polyurethane Tyre (Cast Iron)

- Load capacities from 80kg up to 4080kg
- Wheel sizes from 50mm to 300mm
- Up to 10x life of rubber tyre wheels
- Wear resistant
- Strong & low running noise
- Extremely resilient to oils, greases, petrol, and to a wide range of chemicals

Bearing Types



Plain Bore



Roller Bearing




Taper Roller Bearing



Ball Bearing

Polyurethane Tyre / Cast Iron Centre

Wheel Dia. (mm)	Tread Width (mm)	Bore Size (mm)	Hub Length (mm)	Load Cap. (kg)	Bearing Type	Part Number
A	B	C	D			
50	14	12	17	80	Plain Bore	050PT0L
75	29	12	39	150	Plain Bore	WSU3M12
80	36	15	36	250	Ball Bearing	AW080PCB
100	29	12	45	250	Plain Bore	100PT04
100	29	12	45	250	Roller Bearing	100PT14
100	43	15	48	295	Roller Bearing	WSU4RBM15
100	40	20	40	300	Ball Bearing	AW100PCB
100	38	20	57	340	Ball Bearing	100PT2H
100	40	15	47	350	Ball Bearing	KW100PCB
100	40	20	50	350	Ball Bearing	KMW100PCBJ
125	35	15	48	325	Roller Bearing	WSU5RBM15
125	32	12	45	350	Plain Bearing	125PT04
125	32	12	45	350	Roller Bearing	125PT14
125	40	20	40	400	Ball Bearing	AW125PCB
125	38	20	57	425	Ball Bearing	125PT2H
125	50	20	60	450	Ball Bearing	12520241
150	40	20	40	500	Ball Bearing	AW150PCB40
150	38	20	60	600	Roller Bearing	WSU61RBM20
150	50	20	60	650	Ball Bearing	AW150PCB
150	50	20	60	700	Ball Bearing	15020241
150	45	20	60	725	Roller Bearing	WSU6RBM20
150	45	25.4	60	725	Roller Bearing	WSU6LRB
150	38	20	60	730	Plain Bore	150PT05
150	38	20	60	730	Roller Bearing	150PT15
150	38	20	57	730	Ball Bearing	150PT2H
160	50	20	60	850	Ball Bearing	KW160PC2B
160	50	20	60	900	Ball Bearing	FTP1605020
200	50	20	60	1000	Ball Bearing	20020241
200	45	20	60	1100	Roller Bearing	200PT15
200	45	20	57	1100	Ball Bearing	200PT2H
200	50	20	60	1100	Ball Bearing	AW200PCB
250	51	25	60	1135	Roller Bearing	WSU10RBM25
250	51	31.8	60	1135	Roller Bearing	WSU10LRB
250	45	25	60	1200	Roller Bearing	250PT1H
250	45	25	57	1200	Ball Bearing	250PT2H
250	50	25	60	1400	Ball Bearing	25025241
250	60	25	60	1400	Ball Bearing	AW250PCB
250	75	25	83	2500	Ball Bearing	250PT2P
250	76	31.8	92	2950	Taper Roller Bearing	WSU210TM
300	57	25	60	1270	Roller Bearing	WSU12RBM25
300	50	25	60	1400	Ball Bearing	30025241
300	45	25	57	1400	Ball Bearing	300PT2H
300	70	30	70	2200	Ball Bearing	AW300PCB
300	102	31.8	118	4080	Taper Roller Bearing	WSU312TM

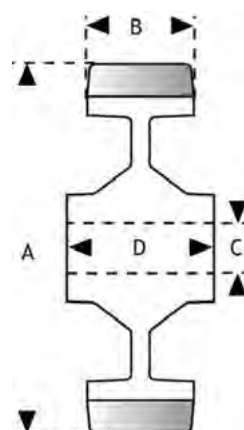


PT Designer Series

Polyurethane Tyred Wheels

- High performance cast iron wheels with quality REVVOTHANE polyurethane tyres
- For wheels in conveyor and transportation systems
- High load bearing capacity, minimal build up of heat and high abrasion resistance

Wheel Dia. (mm)	Tread Width (mm)	Load Capacity (kg)	Axle Bore (mm)	Dimensions (mm)					Part Number		
				A	B	C	D	E	Plain Bore	Plain Bore Keywayed	Ball Bearing
75	35	300	12	75	35	35	48	55	07535PT012	-	07535PT212
	35	300	20	75	35	35	48	55	-	-	07535PT220
100	40	500	12	100	40	45	48	57	10040PT012	-	-
	40	500	20	100	40	45	48	57	10040PT020	-	10040PT220
	40	500	25	100	40	45	48	57	10040PT025	-	10040PT225
125	45	600	25	125	45	50	48	55	12545PT025	-	12545PT225
150	35	700	20	150	35	40	50	60	15035PT020	-	15035PT220
	35	700	25	150	35	40	50	60	-	-	15035PT225
	50	900	20	150	50	55	52	65	-	-	15050PT220
	50	900	25	150	50	55	52	65	15050PT025	15050PTU25	15050PT225
	50	900	30	150	50	55	52	65	15050PT030	-	-
200	40	1000	25	200	40	50	70	80	-	20040PTU25	-
	40	1000	30	200	40	50	70	80	-	20040PTU30	-
	60	1300	30	200	60	70	70	80	20060PT030	-	20060PT230
	60	1300	35	200	60	70	70	80	-	20060PTU35	-
250	45	1200	30	250	45	55	80	100	-	25045PTU30	-
	70	2000	30	250	70	80	80	100	25070PT030	-	-
300	75	2800	30	300	75	85	90	115	30075PT030	-	-
	75	2800	50	300	75	85	90	115	-	30075PTU50	-

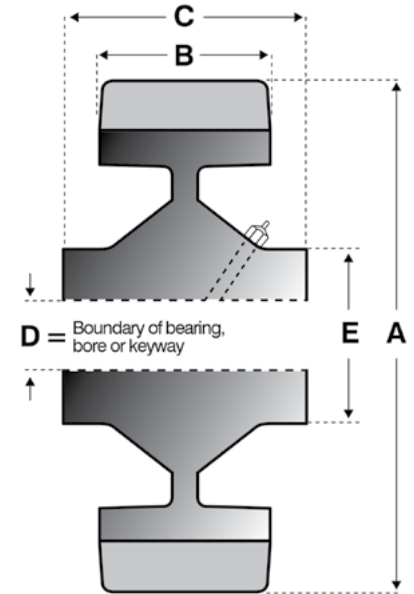

PT 'Designer' Series Selection Notes:

- *Stated load capacities are for operation under ideal conditions, i.e. the wheel operates infrequently on a smooth surface without axial loading
- *Wheel loadings must be reduced as follows for any of the following conditions

Frequent use: In use for more than 45 minutes continuous operation, reduce loadings by 25%
Driving applications: Reduce Loadings by 30%
Speeds 6 - 10kph: Reduce Loadings by 20%
Speeds 10 - 16kph: Reduce Loadings by 30%

Special note: Reductions are cumulative if more than one condition exists

All available in the following types



Plain Bore



Plain Bore Keywayed




Ball Bearing

Castor Wheels

Cast Iron (Solid)

- Load capacities from 250kg up to 1400kg
- Wheel sizes from 100mm to 250mm
- Combine strength & shock resistance
- Long life and economical
- Not affected by swarf or aggressive materials

Bearing Types



Plain Bore




Roller Bearing



Ball Bearing

Solid Cast Iron

Wheel Dia. (mm)	Tread Width (mm)	Bore Size (mm)	Hub Length (mm)	Load Cap. (kg)	Bearing Type	Part Number
A	B	C	D			
75	25	10	30	135	Plain Bore	075CI03
75	32	12	40	170	Plain Bore	WCI3M12
75	34	12	45	190	Plain Bore	075CI04
75	34	12	45	190	Roller Bearing	075CI14
100	38	12	45	250	Plain Bore	100CI04
100	38	12	45	250	Roller Bearing	100CI14
100	45	20	49	300	Ball Bearing	KW100CI2H
100	45	20	49	320	Ball Bearing	100CI2H
100	38	15	48	450	Plain Bore	WCI4M15
100	38	15	48	450	Roller Bearing	WCI4RBM15
125	38	12	45	500	Plain Bore	125CI04
125	38	12	45	295	Roller Bearing	125CI14
125	40	20	60	500	Ball Bearing	12520441
125	41	15	48	630	Plain Bore	WCI5M15
125	41	15	48	630	Roller Bearing	WCI5RBM15
125	45	20	49	630	Ball Bearing	125CI2H
150	45	20	60	600	Ball Bearing	15020441
150	45	20	60	1000	Plain Bore	KW150CI20
150	45	20	60	1000	Roller Bearing	150CI15
150	45	20	49	1000	Ball Bearing	150CI2H
150	45	20	60	1180	Plain Bore	WCI6M20
150	45	20	60	1180	Roller Bearing	WCI6RBM20
150	45	25.4	60	1180	Plain Bore	WCI6L
200	45	20	60	1100	Ball Bearing	20020441
200	45	20	60	1150	Roller Bearing	200CI15
200	45	20	49	1150	Ball Bearing	200CI2H
200	50	20	60	1150	Plain Bore	KW200CI20
200	45	20	60	1270	Plain Bore	WCI8M20
200	45	20	60	1270	Roller Bearing	WCI8RBM20
200	45	25.4	60	1270	Plain Bore	WCI8L
250	51	25	60	1360	Roller Bearing	WCI10RBM25
250	51	25.4	60	1360	Roller Bearing	WCI10RB
250	54	25	60	1400	Ball Bearing	25025441

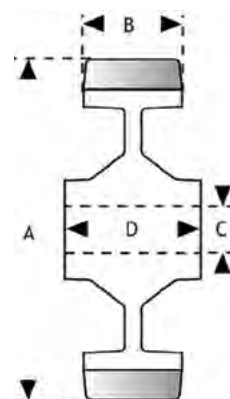

Castor Wheels

Solid Rubber Tyre

- Load capacities from 70kg up to 1100kg
- Wheel sizes from 100mm to 450mm
- Quiet running
- Vibration absorption
- Kind to floors

Bearing Types



Plain Bore




Roller Bearing



Ball Bearing


Solid Rubber Tyre / Polypropylene Centre

Wheel Dia. (mm)	Tread Width (mm)	Bore Size (mm)	Hub Length (mm)	Load Cap. (kg)	Bearing Type	Centre Colour / Material	Part Number
A	B	C	D				
160	40	20	51	150	Plain Bore	Red Polypropylene	EPR16020/51RED
160	40	20	60	135	Roller	Black Polypropylene	MVW160BRP1B
160	40	25.4	51	150	Plain Bore	Red Polypropylene	EPR16025.4/51RED
200	50	12.7	51	200	Plain Bore	Red Polypropylene	EPR20012.7/51RED
200	50	20	51	200	Plain Bore	Red Polypropylene	EPR20020/51RED
200	50	20	51	200	Roller	Red Polypropylene	EPR200R20/51RED
200	50	25.4	51	200	Plain Bore	Red Polypropylene	EPR20025.4/51RED
200	50	25.4	51	200	Roller	Red Polypropylene	EPR200R25.4/51RED
250	60	20	51	275	Roller	Red Polypropylene	EPR250R20/51RED
250	60	25.4	51	275	Plain Bore	Red Polypropylene	EPR25025.4/51RED
250	60	25.4	51	275	Roller	Red Polypropylene	EPR250R25.4/51RED

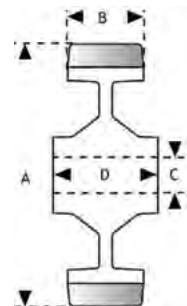


Solid Rubber Tyre / Pressed Steel Centre

Wheel Dia. (mm)	Tread Width (mm)	Bore Size (mm)	Hub Length (mm)	Load Cap. (kg)	Bearing Type	Part Number
A	B	C	D			
100	30	12	44.4	70	Roller Bearing	KW100RMB
125	37	12	44.4	100	Roller Bearing	KW125RMB
160	48	20	60	140	Roller Bearing	KW160RMB
200	50	20	60	205	Roller Bearing	KW200RMB
200	50	25.4	51	250	Plain Bore	NSS20025.4/51SIL
200	50	25.4	51	250	Roller Bearing	NSS200R25.4/51SIL
250	60	25	75	300	Roller Bearing	AW250RMB25

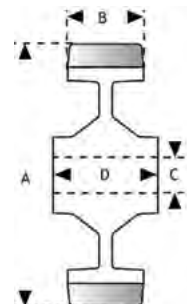

Solid Rubber Tyre / Painted Steel Centre

Wheel Dia. (mm)	Tread Width (mm)	Bore Size (mm)	Hub Length (mm)	Load Cap. (kg)	Bearing Type	Centre Colour	Part Number
A	B	C	D				
355	75	25.4	63	400	Roller Bearing	Red	BWR35525.4/63RIBRED
400	90	25.4	83	500	Ball Bearing	Black	BWB40025.4/83RIBBLK
450	115	30	75	1100	Ball Bearing	White	BWB45030/75RIBWHITE



Castor Wheels

Pneumatic Wheels

- Load capacities from 100kg up to 150kg
- Wheel sizes from 220mm to 400mm
- Excellent shock & vibration absorption
- Low rolling resistance on uneven surfaces
- Kind to floors
- Available with Puncture Proof Microcellular Polyurethane tyres

Bearing Types




Plain Bore



Roller Bearing

Pneumatic Tyre / Polypropylene Centre

Wheel Dia. (mm)	Tread Width (mm)	Bore Size (mm)	Hub Length (mm)	Load Cap. (kg)	Bearing Type	Tread Type	Part Number
A	B	C	D				
220	65	20	76	100	Plain Bore	4 Ply LUG	PWP220PB20
220	65	25	76	100	Plain Bore	4 Ply LUG	PWP220PB25
220	65	25.4	76	100	Plain Bore	4 Ply LUG	PWP220PB1
220	65	20	73	100	Roller Bearing	4 Ply LUG	PWP220RB20
220	65	25	73	100	Roller Bearing	4 Ply LUG	PWP220RB25
220	65	25.4	73	100	Roller Bearing	4 Ply LUG	PWP220RB1
260	85	20	75	150	Roller Bearing	2 Ply Diamond	AW260PWR20
260	85	20	76	120	Plain Bore	4 Ply Diamond	PWP260PB20
260	85	25	76	120	Plain Bore	4 Ply Diamond	PWP260PB25
260	85	25.4	76	120	Plain Bore	4 Ply Diamond	PWP260PB1
260	85	20	73	120	Roller Bearing	4 Ply Diamond	PWP260RB20
260	85	25	73	120	Roller Bearing	4 Ply Diamond	PWP260RB25
260	85	25.4	73	120	Roller Bearing	4 Ply Diamond	PWP260RB1
300	100	20	76	150	Plain Bore	4 Ply Diamond	PWP300PB20
300	100	25	76	150	Plain Bore	4 Ply Diamond	PWP300PB25
300	100	25.4	76	150	Plain Bore	4 Ply Diamond	PWP300PB1
300	100	20	73	150	Roller Bearing	4 Ply Diamond	PWP300RB20
300	100	25	73	150	Roller Bearing	4 Ply Diamond	PWP300RB25
300	100	25.4	73	150	Roller Bearing	4 Ply Diamond	PWP300RB1
360	80	20	66	125	Plain Bore	4 Ply Block	PWP360PB20
360	80	25	66	125	Plain Bore	4 Ply Block	PWP360PB25
360	80	25.4	66	125	Plain Bore	4 Ply Block	PWP360PB1
360	80	20	63	125	Roller Bearing	4 Ply Block	PWP360RB20
360	80	25	63	125	Roller Bearing	4 Ply Block	PWP360RB25
360	80	25.4	63	125	Roller Bearing	4 Ply Block	PWP360RB1
400	100	20	66	150	Plain Bore	4 Ply Rib	PWP400PB20
400	100	25	66	150	Plain Bore	4 Ply Rib	PWP400PB25
400	100	25.4	66	150	Plain Bore	4 Ply Rib	PWP400PB1
400	100	20	63	150	Roller Bearing	4 Ply Rib	PWP400RB20
400	100	25	63	150	Roller Bearing	4 Ply Rib	PWP400RB25
400	100	25.4	63	150	Roller Bearing	4 Ply Rib	PWP400RB1

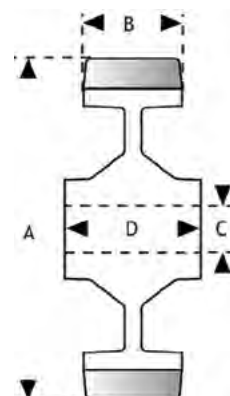

Call us to find out about Puncture Proofs

Ball Transfer Units

Flange, Drop in, and, Base Plate Models


- Chrome steel balls as standard: contact surfaces case hardened for durability
- All types fitted with felt seals to prevent dust getting into small balls
- Dirt exit holes fitted as standard

Flanged “Flying Saucer” Model

Part #	Description	Load Ball Dia. (mm)	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	F (mm)	Load Capacity
K25BTUFL2	Chrome Steel Load Balls	25.4	73.5	30.5	14.2	40	55.6	5	60 kg
K25BTUFL3	Chrome Steel Load Balls	25.4	73.5	30.5	14.2	40	55.6	5	60 kg
KS25NBTU* [2] or [3]	Nylon Load Ball	25.4	73.5	30.5	14.2	40	55.6	5	25 kg
K32SSBTU* [2] or [3]	Stainless Steel Balls	31.75	73.75	36.75	16.3	47	58.7	5	125kg



K25BTUFL3

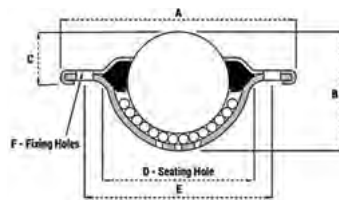


K25BTUFL2

* Add a 2 or 3 to the end of the code to specify 2 or 3-hole fixing.


“Drop In” Model

Part #	Description	Load Ball Dia. (mm)	A (mm)	B (mm)	C (mm)	D (mm)	Load Capacity
K15BTU	Chrome Steel Load Balls	15.8	31	21	9.5	24	60 kg
K15NBTU	Nylon Load Ball (Stainless Small Balls)	15.8	31	21	9.5	24	10 kg
K22BTU	Chrome Steel Load Balls	22.2	45.25	27.5	8.2	35.81	160 kg
K22NBTU	Nylon Load Ball (Stainless Small Balls)	22.2	45.25	27.5	8.2	35.81	20 kg

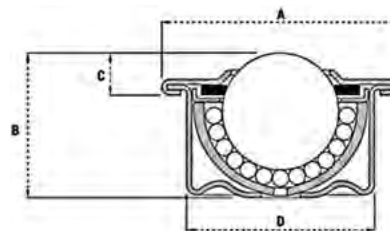

Base Plate Model

Part #	Description	Load Ball Dia. (mm)	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	F (mm)	G (mm)	Load Capacity
K25BTUBASE2	Chrome Steel Load Balls	25.4	41.8	30.25	8	68.5	55.56	5.5	0.9	55 kg
K25SSBTUBASE2	Stainless Steel Load Balls	25.4	41.8	30.25	8	68.5	55.56	5.5	0.9	55 kg

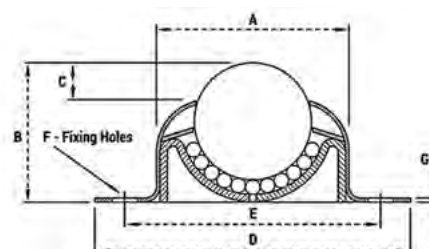

Adjustable Feet

- Rigid Stem Adjusters have a stem that cannot tilt AND a base that cannot spin
- Ideal for use with our range of Threaded Inserts
- This range is a sample of what we offer please contact us if you can't find what you're looking for here



Rigid Stem

Stem rigid & Base Fixed

Keystone Part	Base Dia	Base Height	Stem Size (mm)	Load Capacity (kg)	Base Material	Base Material	Type	Degrees of Tilt	Notes
GL25X-M8X25R	25mm	16mm	M8 x 25	100	Polypropylene	Zinc Plated Steel	Rigid	N/A	
GL25XM8X-37.5R	25mm	16mm	M8 x 37.5	100	Polypropylene	Zinc Plated Steel	Rigid	N/A	
GL30X-M10X30R	30mm	16mm	M10 x 30	500	Polypropylene	Zinc Plated Steel	Rigid	N/A	Knurled base
GL30X-M8X25R	30mm	16mm	M8 x 25	250	Nylon	Zinc Plated Steel	Rigid	N/A	
GL40X-M8X25R	40mm	16mm	M8 x 25	250	Nylon	Zinc Plated Steel	Rigid	N/A	
GL50X-M8X25R	50mm	16mm	M8 x 25	250	Nylon	Zinc Plated Steel	Rigid	N/A	
GL30X-M10X25R	30mm	16mm	M10 x 25	250	Nylon	Zinc Plated Steel	Rigid	N/A	
GL40X-M10X25R	40mm	16mm	M10 x 25	250	Nylon	Zinc Plated Steel	Rigid	N/A	
GL50X-M10X25R	50mm	16mm	M10 x 25	250	Nylon	Zinc Plated Steel	Rigid	N/A	
GL22XM8X-22RHEX	22mm	12mm	M8 x 22	250	Polypropylene	Zinc Plated Steel	Rigid	N/A	Hex Base
GL30XM8X-22RHEX	30mm	12mm	M8 x 22	250	Polypropylene	Zinc Plated Steel	Rigid	N/A	Hex Base

Adjustable Feet

- Non-tilting adjustable feet have a non-tilting stem with a base that CAN spin
- Ideal for use with our range of threaded inserts
- This range is a sample of what we offer please contact us if you can't find what you're looking for here



Non Tilting

Stem Rigid & Base Spins

Keystone Part	Base Dia	Base Height	Stem Size (mm)	Load Capacity (kg)	Base Material	Base Material	Type	Degrees of Tilt	Notes
GL40XM10X45NT	40mm	19mm	M10 x 45	1000	Nylon	Zinc Plated Steel	Non Tilting	N/A	
GL50XM10X45NT	50mm	19mm	M10 x 45	1000	Nylon	Zinc Plated Steel	Non Tilting	N/A	
GL40XM10X70NT	40mm	19mm	M10 x 70	750	Nylon	Zinc Plated Steel	Non Tilting	N/A	
GL50XM10X70NT	50mm	19mm	M10 x 70	750	Nylon	Zinc Plated Steel	Non Tilting	N/A	

Adjustable Feet

- Tilting adjustable feet have a threaded stems that can tilt
- Ideal for use with our range of threaded inserts
- This range is a sample of what we offer please contact us if you can't find what you're looking for here



Tilting

Stem tilts

Keystone Part	Base Dia	Base Height	Stem Size (mm)	Load Capacity (kg)	Base Material	Base Material	Type	Degrees of Tilt	Notes
GL32XM8X25T	32mm	20mm	M8 x 25	75	PE	Zinc Plated Steel	Tilting	20 Degrees	
GL40XM8X25T	40mm	20mm	M8 x 25	100	PE	Zinc Plated Steel	Tilting	20 Degrees	
GL32XM10X37.5T	32mm	20mm	M10 x 37.5	75	PE	Zinc Plated Steel	Tilting	20 Degrees	Knurled base
GL40XM10X37.5T	40mm	20mm	M10 x 37.5	100	PE	Zinc Plated Steel	Tilting	20 Degrees	
GL47.5XM10X50T	47.5mm	20mm	M10 x 50	250	Polypropylene	Zinc Plated Steel	Tilting	20 Degrees	
GL47.5XM10X100T	47.5mm	20mm	M10 x 100	250	Polypropylene	Zinc Plated Steel	Tilting	20 Degrees	
GL55XM10X50T	55mm	20mm	M10 x 50	250	Polypropylene	Zinc Plated Steel	Tilting	20 Degrees	
GL55XM10X100T	55mm	20mm	M10 x 100	250	Polypropylene	Zinc Plated Steel	Tilting	20 Degrees	

Expander Tube Fittings

- This range of nylon fitting allow castors to be fitted to hollow tube constructed equipment and furniture
- Available loose or factory fitted to your choice of single bolt hole castor
- For castors with a 12mm single bolt hole, the ACZ500 reducer is required to reduce the bolt hole size to 10mm



Nylon expander tube fittings

Tube Size (Internal mm)		Bolt Size	Catalogue Reference	
Min	Max		Round	Square
19	21.5	M10	WR07 19/21.5	n/a
21.5	24	M10	WR07 21.5/24	WR47 21.5/24
24	27	M10	WR07 24/27	WR47 24/27
27	30	M10	WR07 27/30	WR47 27/30
31	35	M10	WR07 31/35	n/a
32	35	M10	n/a	WR47 32/35
36	40	M10	n/a	WR47 36/40

12mm to 10mm Reducer	ACZ500
----------------------	--------

Threaded Inserts

- A range of square, round and rectangular threaded tube inserts for use with our range of adjustable feet
- Thread sizes: M8, M10 and M12
- This range is a sample of what we offer please contact us if you can't find what you're looking for here



Round

Part Number	Outside Diameter	Wall Thickness	Metric Wall Thickness	Thread	Material
RNDM85740	25mm	1.0 - 2.0mm		M8	Black Plastic
RNDM105750	50mm	1.0 - 2.0mm		M10	Black Plastic
RNDM125761	1 1/2"	14g	2.03mm	M12	Black Plastic



Square

Part Number	Outside Dimensions	Wall Thickness	Metric Wall Thickness	Thread	Material
SQRM85806	3/4" x 3/4"	16g	1.62mm	M8	Black Plastic
SQRM84842	1" x 1"	16/18g	1.21-1.62mm	M8	Black Plastic
SQRM85811	30mm x 30mm	1.5mm		M8	Black Plastic
SQRM85854	1 1/4" x 1 1/4"	16g	1.62mm	M8	Black Plastic
SQRM105807	25mm x 25mm	1.5mm		M10	Black Plastic
SQRM105808	30mm x 30mm	1.5mm		M10	Black Plastic
SQRM105856	1 1/4" x 1 1/4"	16g	1.62mm	M10	Black Plastic
SQRM105866	1 1/2" x 1 1/2"	16g	1.62mm	M10	Black Plastic
SQRM105871	1 1/2" x 1 1/2"	12g	2.64mm	M10	Black Plastic
SQRM105809	40mm x 40mm	1.5mm		M10	Black Plastic
SQRM105810	50mm x 50mm	1.5mm		M10	Black Plastic



Rectangular

Part Number	Outside Dimensions	Wall Thickness	Metric Wall Thickness	Thread	Material
RCTM85884	40mm x 20mm	1.5mm		M8	Black Plastic
RCTM105860	1 1/2" x 3/4"	16g	1.62mm	M10	Black Plastic
RCTM105883	50mm x 25mm	1.5mm		M10	Black Plastic
RCTM105887	60mm x 30mm	2.0mm		M10	Black Plastic
SQRM105810	50mm x 50mm	1.5mm		M10	Black Plastic

**Also available
from stock**


KEYSTONE
CASTOR COMPANY



Furniture Castors



Pallet Rollers

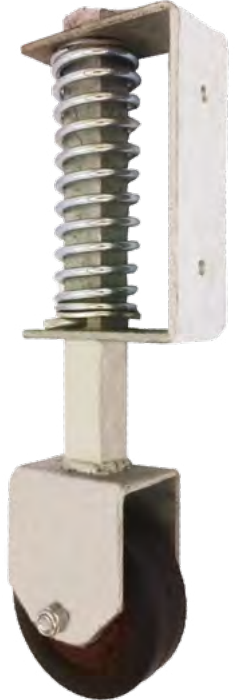

Gate Castors



Application Wheels



Truck Locks



Low Level Castors

All this and so much more,
Call us on 0121 772 1010
or visit us online at
www.keystonecastors.co.uk

**The Premier stockist
of the UK's favourite Brands**



Head Office | Unit 1, St Andrews Trading Estate, 111 Great Barr Street, Birmingham, B9 4BB